

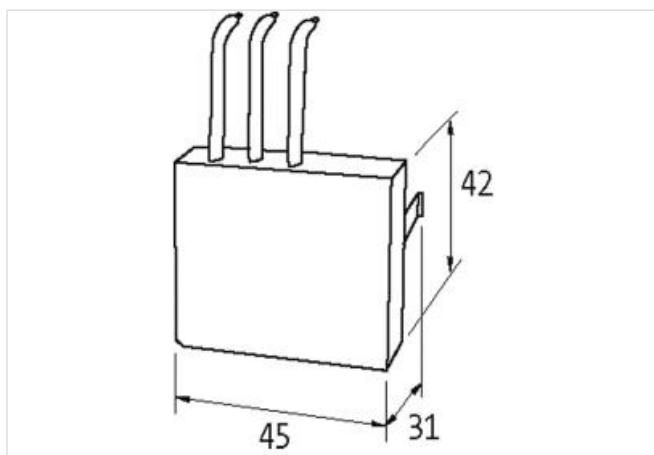
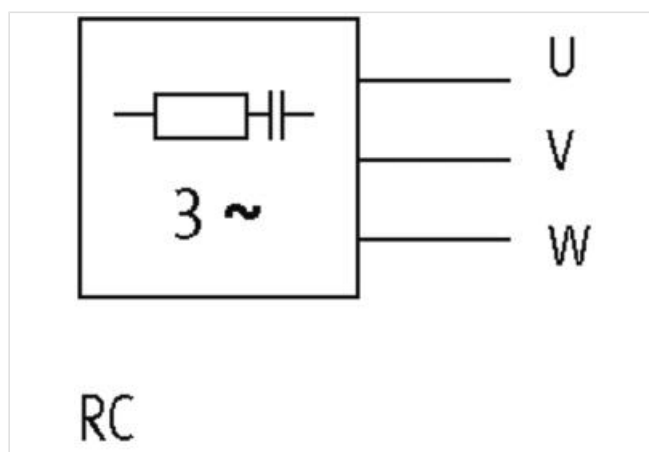
SUPPRESSOR FOR SIEMENS CONTACTOR S00 MOTOR

RC, star, 3x575 VAC, 7.5 kV

3× 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Odkaz k produktu**Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC002498
customs tariff number	85363010
GTIN	4048879412742
Packaging unit	1
Electrical data Supply	
Power frequency	50 ... 60 Hz
Electrical data Input	
Input voltage AC	575 V
Installation Connection	
Connection information	Connection wires
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Material potting compound	2-component epoxy
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	Siemens Schütz Sirius 3 RT 201 mit Federzuganschluss
Height	42 mm
Width	45 mm
Depth	31 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C