

**MVP12, 6XM12, 4POLE, PLUGGABLE CABLE**

10.0m PUR/PVC 6x0,34+3x0,75

Further cable lengths on request.

6-way, 4-pole

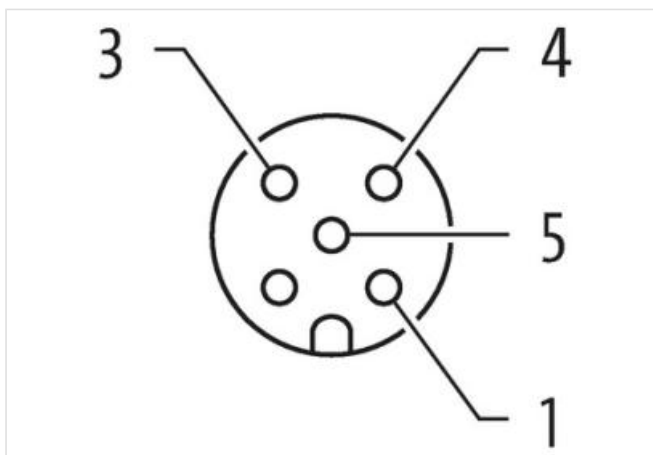
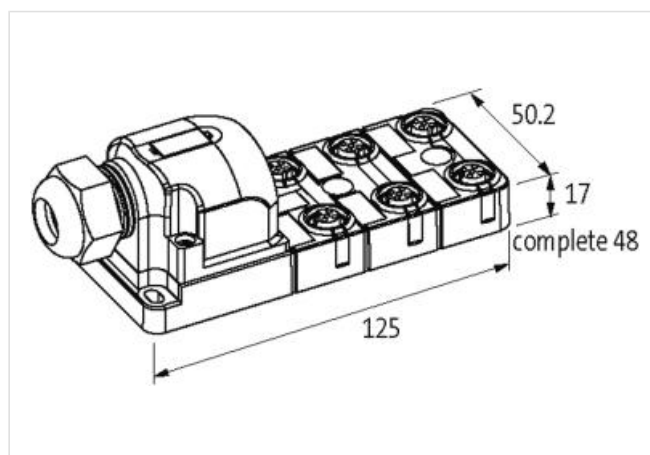
Plastic housings with good resistance against chemicals and oils.

PUR/PVC

The resistance to aggressive media should be individually tested for your application. Further details on request.

10.0 m

with LED for digital PNP-signals 24 V DC

**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27279219 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |

|                       |               |
|-----------------------|---------------|
| ECLASS-8.0            | 27279219      |
| ECLASS-9.0            | 27440108      |
| ECLASS-10.1           | 27440108      |
| ECLASS-11.1           | 27440108      |
| ECLASS-12.0           | 27440108      |
| ETIM-5.0              | EC002585      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879064606 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Operating voltage DC min.          | 18 V |
| Operating voltage DC max.          | 30 V |
| Current operating per contact max. | 4 A  |
| Total current max.                 | 8 A  |

**Industrial communication**

|                            |   |
|----------------------------|---|
| Number of signals per port | 1 |
|----------------------------|---|

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP65, IP67        |
| Additional condition protection degree | inserted, screwed |

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |     |
|------------------|-----|
| Material housing | PBT |
|------------------|-----|

**Mechanical data | Mounting data**

|        |         |
|--------|---------|
| Height | 125 mm  |
| Width  | 50,2 mm |
| Depth  | 17 mm   |

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 80 °C                      |
| Additional condition temperature range | depending on cable quality |

**Installation | Cable**

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Cable identification              | 335                                                            |
| Jacket Color                      | gray                                                           |
| Type of Certificate               | cURus                                                          |
| Amount stranding                  | 1                                                              |
| Stranding                         | 4 wires twisted                                                |
| Cable shielding (type)            | copper braid, tinned                                           |
| Cable shielding (coverage)        | 85 %                                                           |
| Banding                           | Fleece, Foil                                                   |
| wire arrangement                  | brown, black, blue, white                                      |
| Cable weight                      | 56,1 g/m                                                       |
| Material jacket                   | PUR                                                            |
| Shore hardness jacket             | 85 ± 3 Shore A                                                 |
| Freedom from ingredients (jacket) | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)           | 5,9 mm                                                         |
| Tolerance outer diameter (sheath) | ± 5 %                                                          |

|                                                   |                                                                |
|---------------------------------------------------|----------------------------------------------------------------|
| Material wire insulation                          | PP                                                             |
| Amount wires                                      | 4                                                              |
| Outer diameter insulation                         | 1,55 mm                                                        |
| Outer diameter tolerance core insulation          | ± 5 %                                                          |
| Shore hardness wire insulation                    | 72 ± 3 Shore D                                                 |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount strands (wire)                             | 42                                                             |
| Diameter of single wires                          | 0,1 mm                                                         |
| Conductor crosssection (wire)                     | 0,34 mm <sup>2</sup>                                           |
| Material conductor wire                           | Stranded copper wire, bare                                     |
| Conductor type (wire)                             | strand class 6                                                 |
| Nominal voltage AC max.                           | 300 V                                                          |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                              |
| Current load capacity min. wire                   | 4,8 A                                                          |
| Electrical resistance line constant wire          | 52 Ω/km @ 20 °C                                                |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                                    |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                                    |
| Min. operating temperature (static)               | -40 °C                                                         |
| Max. operating temperature (fixed)                | 80 °C                                                          |
| Operating temperature min. (dynamic)              | -20 °C                                                         |
| Operating temperature max. (dynamic)              | 80 °C                                                          |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090            |
| chemical resistance                               | Good, application-related testing                              |
| Gasoline resistance                               | Good, application-related testing                              |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing           |
| Bending radius (dynamic)                          | 10 x Outer diameter                                            |

**Connection type 2**

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| Color contact carrier    | gray           |
| No. of poles             | 9              |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 4              |
| PIN 1                    | +              |
| PIN 2                    | n.c.           |
| PIN 3                    | -              |
| PIN 4                    | NO S 1         |
| PIN 5                    | PE             |