

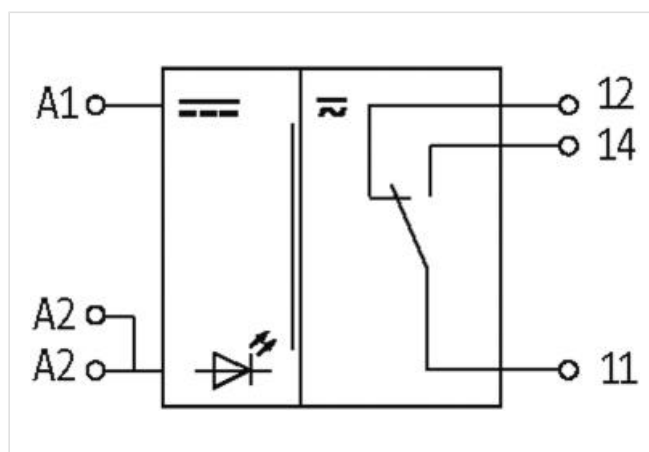
RMI 11/230V AC OUTPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 8 A

1 relay; 1 NO/NC contact
 8 A
 230 V AC/DC
 Screw terminals

Odkaz k produktu**Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

ECLASS-6.0	27371001
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-8.0	27371601
ECLASS-9.0	27371601
ECLASS-10.1	27371601
ECLASS-11.1	27371601
ECLASS-12.0	27371601
ETIM-5.0	EC001437
customs tariff number	85364900
GTIN	4048879027410
Packaging unit	1

Electrical data | Input

Input voltage AC	230 V
Input voltage AC min.	195 V
Input voltage AC max.	253 V
Input voltage DC	230 V
Input voltage DC min.	195 V
Input voltage DC max.	253 V
Input current	5 mA

Electrical data | Output

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.
 Zodpovednosť sa obmedzuje hrubou nebanlivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 07.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

Utilization category AC-15 (EN IEC 60947-5-1) 3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V

Utilization category DC-13 (EN IEC 60947-5-1) 2,5 A @ 24 V, 0,4 A @ 110 V, 0,3 A @ 230 V

Additional condition switching frequency with load

Switching frequency max. 0,1 Hz

Power rating AC max. 2000 VA

Power rating DC max. 240 W

Switching voltage AC max. 250 V

Switching voltage DC max. 250 V

Switching current DC 1 mA

Switching current max. 8 A

Switching capacity AC-12 (EN IEC 60947-5-1) 8 A (24/110/230 V AC)

Diagnostics

Status indication LED red

Device protection

Condition lifetime load-dependent

Device protection | Electrical

Rated surge voltage 6 kV

Electrical lifetime 20000000 Cycles

Device protection | Mechanical

Mechanical endurance 20000000 Cycles

Mechanical data

Drop-out time max. 15 ms

Response time max. 10 ms

Bounce time max. 2 ms

Mechanical data | Material data

Material contact Ag Ni

Mechanical data | Mounting data

Mounting method geschnappt

Suitable for mounting type Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max. 60 °C

Storage temperature min. -40 °C

Storage temperature max. 80 °C

Connection type 2

Connection Screw terminals SK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 3

PIN 1 A 2

PIN 2 A 2

PIN 3 A 1

Connection Screw terminals SK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 3

PIN 1 12

PIN 2 11

PIN 3

14