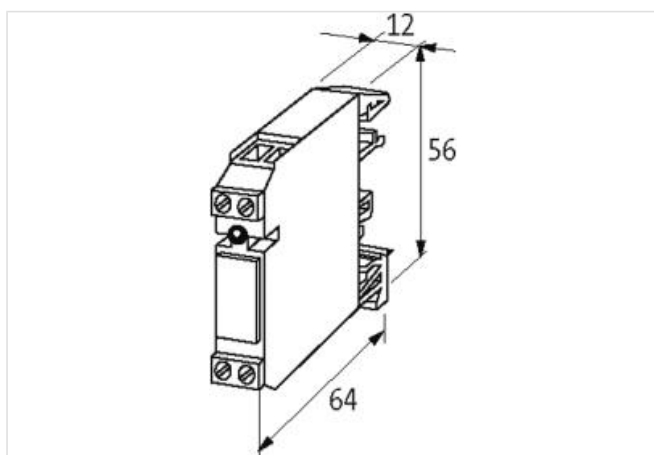
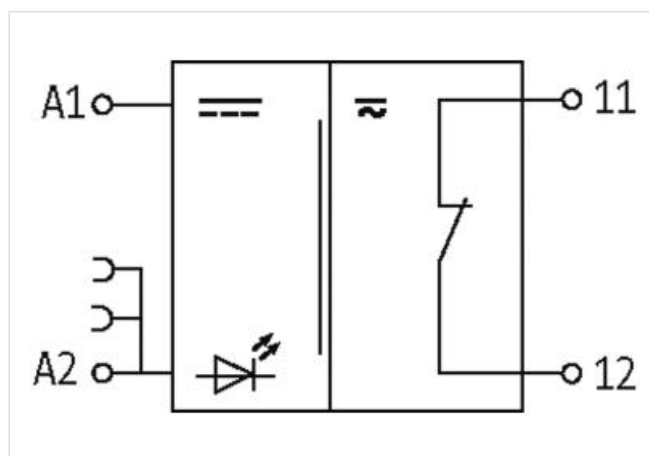


**RMMR11/24VDC WITH GROUND BRIDGE OUTPUT RELAY**

IN: 24 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NC contact  
 5 A  
 24 V AC/DC  
 with minus plug link  
 Screw terminals

**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**General product information**

Scope of delivery Jumper (Art-No. 90960)

**Commercial data**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27371001 |
| ECLASS-6.1 | 27371601 |
| ECLASS-7.0 | 27371601 |

|                       |               |
|-----------------------|---------------|
| ECLASS-8.0            | 27371601      |
| ECLASS-9.0            | 27371601      |
| ECLASS-10.1           | 27371601      |
| ECLASS-11.1           | 27371601      |
| ECLASS-12.0           | 27371601      |
| ETIM-5.0              | EC001437      |
| customs tariff number | 85364900      |
| GTIN                  | 4048879027366 |
| Packaging unit        | 1             |

**Electrical data | Input**

|                       |        |
|-----------------------|--------|
| Input voltage AC      | 24 V   |
| Input voltage AC min. | 19,2 V |
| Input voltage AC max. | 30 V   |
| Input voltage DC      | 24 V   |
| Input voltage DC min. | 19,2 V |
| Input voltage DC max. | 30 V   |
| Input current         | 15 mA  |

**Electrical data | Output**

|                                               |                                             |
|-----------------------------------------------|---------------------------------------------|
| Utilization category AC-15 (EN IEC 60947-5-1) | 3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V        |
| Utilization category DC-13 (EN IEC 60947-5-1) | 1,5 A @ 24 V, 0,3 A @ 110 V, 0,15 A @ 230 V |
| Switching frequency max.                      | 10 Hz                                       |
| Power rating AC max.                          | 1250 VA                                     |
| Power rating DC max.                          | 240 W                                       |
| Switching voltage AC max.                     | 250 V                                       |
| Switching voltage DC max.                     | 250 V                                       |
| Switching current DC                          | 100 mA                                      |
| Switching current max.                        | 5 A                                         |
| Switching capacity AC-12 (EN IEC 60947-5-1)   | 5 A (24/110/230 V AC)                       |

**Diagnostics**

|                       |     |
|-----------------------|-----|
| Status indication LED | red |
|-----------------------|-----|

**Device protection**

|                    |                |
|--------------------|----------------|
| Condition lifetime | load-dependent |
|--------------------|----------------|

**Device protection | Electrical**

|                     |                 |
|---------------------|-----------------|
| Rated surge voltage | 4 kV            |
| Electrical lifetime | 20000000 Cycles |

**Device protection | Mechanical**

|                      |                 |
|----------------------|-----------------|
| Mechanical endurance | 20000000 Cycles |
|----------------------|-----------------|

**Mechanical data**

|                    |        |
|--------------------|--------|
| Drop-out time max. | 15 ms  |
| Response time max. | 10 ms  |
| Bounce time max.   | 1,5 ms |

**Mechanical data | Material data**

|                  |               |
|------------------|---------------|
| Material contact | Ag Ni 0.15 hv |
|------------------|---------------|

**Mechanical data | Mounting data**

|                            |                                     |
|----------------------------|-------------------------------------|
| Mounting method            | geschnappt                          |
| Suitable for mounting type | Mounting rail TH35, G32, (EN 60715) |
| Height                     | 56 mm                               |
| Width                      | 12 mm                               |
| Depth                      | 65 mm                               |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 60 °C |
|----------------------------|-------|

|                          |        |
|--------------------------|--------|
| Storage temperature min. | -40 °C |
|--------------------------|--------|

|                          |       |
|--------------------------|-------|
| Storage temperature max. | 80 °C |
|--------------------------|-------|

**Connection type 2**

|            |                    |
|------------|--------------------|
| Connection | Screw terminals SK |
|------------|--------------------|

|                          |          |
|--------------------------|----------|
| Family construction form | terminal |
|--------------------------|----------|

|        |        |
|--------|--------|
| Gender | female |
|--------|--------|

|              |   |
|--------------|---|
| No. of poles | 2 |
|--------------|---|

|       |    |
|-------|----|
| PIN 1 | 11 |
|-------|----|

|       |    |
|-------|----|
| PIN 2 | 12 |
|-------|----|

|            |                    |
|------------|--------------------|
| Connection | Screw terminals SK |
|------------|--------------------|

|                          |          |
|--------------------------|----------|
| Family construction form | terminal |
|--------------------------|----------|

|        |        |
|--------|--------|
| Gender | female |
|--------|--------|

|              |   |
|--------------|---|
| No. of poles | 2 |
|--------------|---|

|       |     |
|-------|-----|
| PIN 1 | A 1 |
|-------|-----|

|       |     |
|-------|-----|
| PIN 2 | A 2 |
|-------|-----|