

## UFL 34 L PLUG FOR SIGNAL TRANSFER

24 VDC / 1 A - male with LED

Ribbon cable connector + LED




34-pole

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook

### Odkaz k produktu

#### Obrázky

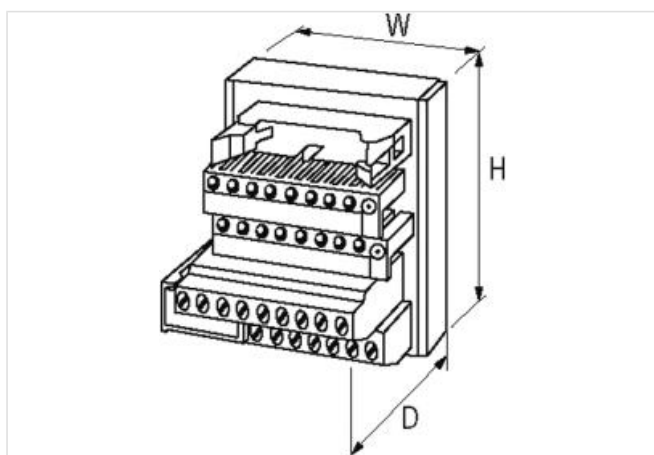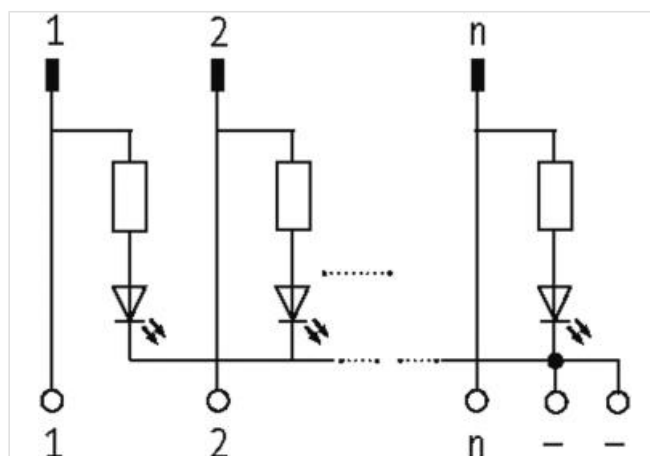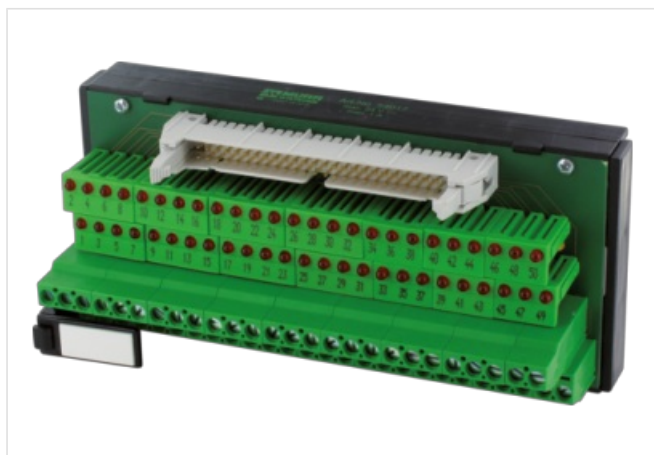

Výrobok sa môže líšiť od zobrazenia



#### Commercial data

|            |          |
|------------|----------|
| ECLASS-6.0 | 27141120 |
| ECLASS-6.1 | 27141120 |
| ECLASS-7.0 | 27141120 |
| ECLASS-8.0 | 27141120 |
| ECLASS-9.0 | 27141120 |

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.  
Zodpovednosť sa obmedzuje hrubou nedbanlivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 26.04.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

|                       |               |
|-----------------------|---------------|
| ECLASS-10.1           | 27141120      |
| ECLASS-11.1           | 27141120      |
| ECLASS-12.0           | 27141120      |
| ETIM-5.0              | EC001283      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879026581 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                        |      |
|------------------------|------|
| Operating voltage AC   | 24 V |
| Operating current max. | 1 A  |

**Diagnostics**

|                       |     |
|-----------------------|-----|
| Status indication LED | red |
|-----------------------|-----|

**Device protection | Electrical**

|                                   |    |
|-----------------------------------|----|
| Overvoltage category (EN 60664-1) | II |
|-----------------------------------|----|

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 63 mm                     |
| Width                      | 95 mm                     |
| Depth                      | 48 mm                     |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |