

MASI67 I/O MODULE

4 digital inputs

Digital inputs

DI4 - 0.2 A (AB) - 4× M12


Y-wiring

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

Odkaz k produktu

Obrázky

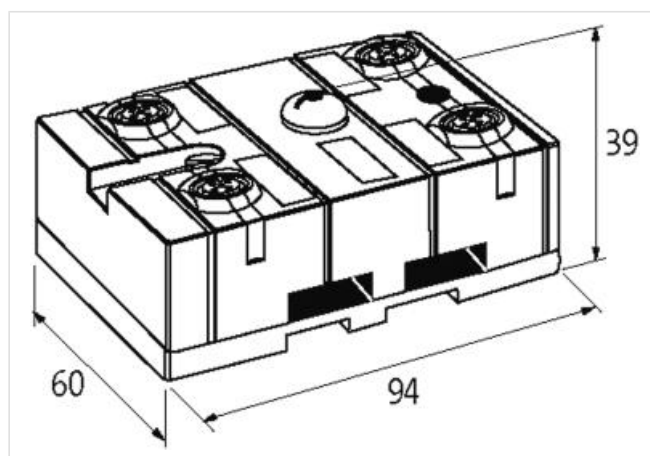

Výrobok sa môže líšiť od zobrazenia



Commercial data

ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ECLASS-10.1	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ETIM-5.0	EC001599
customs tariff number	85176200
GTIN	4048879049009
Packaging unit	1

Electrical data

Y-wiring	yes
----------	-----

Electrical data | Supply

Bus voltage AS-Interface DC min.	26,5 V
Bus voltage AS-Interface DC max.	31,6 V
Current consumption AS-i port max.	250 mA

Electrical data | Input

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.
Zodpovednosť sa obmedzuje hrubou nebanalivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 14.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

Overload resistant	yes
Short-circuit protected	yes
Type input	PNP, for 3-wire sensors or mechanical switches
Current carrying capacity max.	0,17 A

Industrial communication | Bus data

Address setting type	Addressing socket, Master
Slave address range	(0), 1 A...31 A, 1 B...31 B

Industrial communication | AS-Interface

Profile (IO.ID.ID2)	S-0.A.2
---------------------	---------

Diagnostics

Diagnostic via BUS	yes
Diagnostic via LED	per module
LED display	Ethernet connection/data traffic

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Mechanical data | Mounting data

Mounting method	screwed, geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	94 mm
Width	60 mm
Depth	39 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Storage temperature min.	-20 °C
Storage temperature max.	70 °C

Connection type 2

Connection type 1	2
Connection type 2	3
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	Usens +
PIN 2	DI
PIN 3	Usens -
PIN 4	DI
PIN 5	n.c.
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	Usens +
PIN 2	n.c.
PIN 3	Usens -
PIN 4	DI
PIN 5	n.c.