

POWER DISTRIBUTOR CUBE 67

4x M12, 6-pole

Power distributor (4x M12)

System accessories


Protection IP67

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

Odkaz k produktu

Obrázky

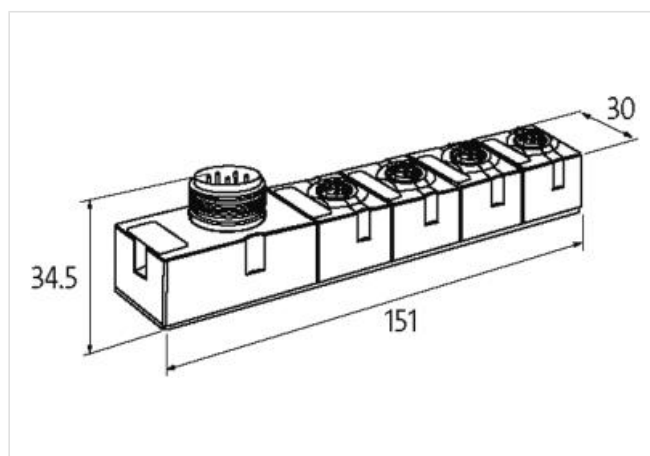

Výrobok sa môže líšiť od zobrazenia



Commercial data

ECLASS-6.0	27242690
ECLASS-6.1	27242611
ECLASS-7.0	27242611
ECLASS-8.0	27242611
ECLASS-9.0	27242611
ECLASS-10.1	27242611
ECLASS-11.1	27242611
ECLASS-12.0	27242611
ETIM-5.0	EC001583
customs tariff number	85389099
GTIN	4048879047852
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
----------------------	------

Electrical data | Input

Input current max.	9 A
--------------------	-----

Electrical data | Output

Max. current output per port	4 A
------------------------------	-----

Diagnostics

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.
Zodpovednosť sa obmedzuje hrubou nebanlivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 01.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

Diagnostic	No voltage
Short circuit diagnosis	yes
Overload diagnosis	yes
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Mechanical data Mounting data	
Suitable for mounting type	2-hole screw mounting
Height	150 mm
Width	30 mm
Depth	34,5 mm
Environmental characteristics Climatic	
Operating temperature min.	0 °C
Operating temperature max.	55 °C
Storage temperature min.	-20 °C
Storage temperature max.	75 °C
Conformity	
Product standard	EN 61131-2
Connection type 2	
Connection type 1	Bus Out
Connection type 2	Power In (UA 0) (UA 1)
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	6
PIN 1	24 V DC
PIN 2	n.c.
PIN 3	0 V
PIN 4	n.c.
PIN 5	n.c.
PIN 6	0 V
Family construction form	7/8"
Gender	male
Color contact carrier	black
No. of poles	5
PIN 1	0 V
PIN 2	0 V
PIN 3	PE
PIN 4	n.c.
PIN 5	24 V DC