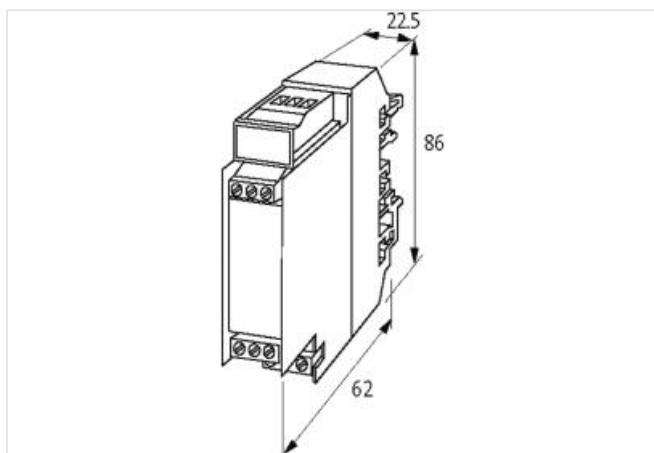
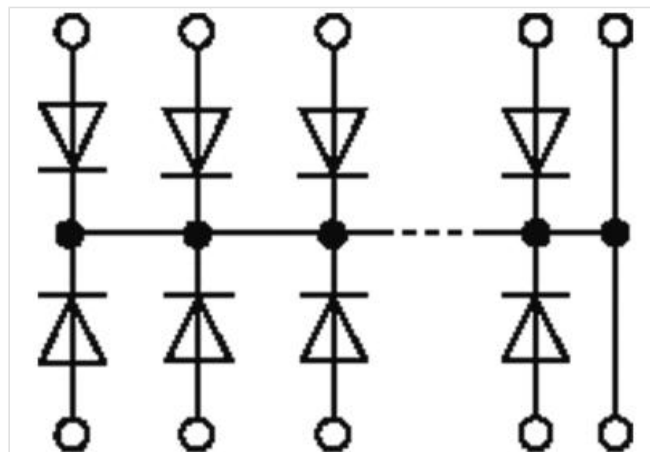


MKS-D 10/1300-1 P DIODE MODULES

Mounting rail / screw-type terminal

10 diodes

Common potential cathode

Odkaz k produktu**Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

ECLASS-6.0	27371010
ECLASS-6.1	27371010
ECLASS-7.0	27371010
ECLASS-8.0	27371010
ECLASS-9.0	27371010
ECLASS-10.1	27371010
ECLASS-11.1	27371010
ECLASS-12.0	27371010

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.
Zodpovednosť sa obmedzuje hrubou nebanalivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 04.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

ETIM-5.0	EC002780
customs tariff number	85411000
GTIN	4048879041935
Packaging unit	1

Electrical data | Supply

Operating voltage AC max.	48 V
Operating voltage DC max.	48 V

Installation

Connection cross section max.	4 mm ²
-------------------------------	-------------------

Installation | Connection

Connection	Screw terminals SK
------------	--------------------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)
Height	86 mm
Width	22,5 mm
Depth	62 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Connection type 1

Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	12