


E-Stop 30 2NC M12(4)

Emergency-Stop

E-Stop 30 2NC M12(4)  
Emergency-Stop  
Mounting hole 30,3 mm  
Connection M12 (4-pin)

Odkaz k produktu

Obrázky

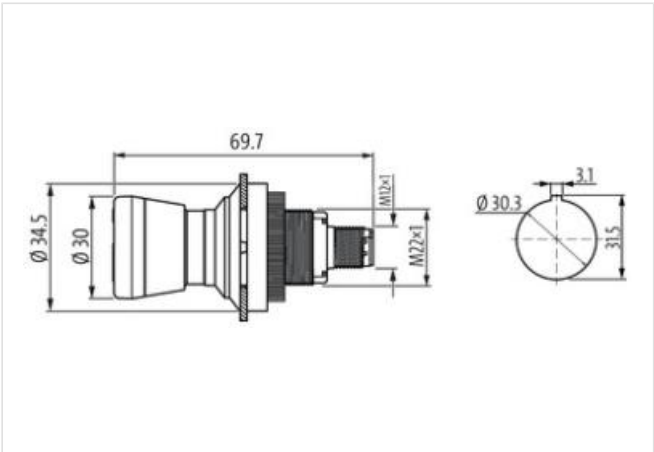

Výrobok sa môže líšiť od zobrazenia



| Commercial data                      |               |
|--------------------------------------|---------------|
| ECLASS-6.1                           | 27371244      |
| ECLASS-7.0                           | 27371244      |
| ECLASS-8.0                           | 27371244      |
| ECLASS-9.0                           | 27371244      |
| ECLASS-10.1                          | 27371244      |
| ECLASS-11.1                          | 27371244      |
| ECLASS-12.0                          | 27371244      |
| customs tariff number                | 85365080      |
| GTIN                                 | 4065909019306 |
| Packaging unit                       | 1             |
| Electrical data   Supply             |               |
| Rated operating voltage AC-15        | 35 V          |
| Rated operating voltage DC-13        | 35 V          |
| Electrical data   Input              |               |
| Short-circuit current                | 1000 A        |
| Electrical data   Output             |               |
| Switching power max.                 | 0,25 W        |
| Voltage switching AC min.            | 1 V           |
| Switching voltage AC max.            | 35 V          |
| Switching voltage AC max. (UL 60947) | 30 V          |

|                                      |        |
|--------------------------------------|--------|
| Voltage switching DC min.            | 1 V    |
| Switching voltage DC max.            | 35 V   |
| Switching voltage DC max. (UL 60947) | 30 V   |
| Switching current min.               | 1 mA   |
| Switching current max.               | 100 mA |

**Installation | Connection**

|                          |     |
|--------------------------|-----|
| Family construction form | M12 |
|--------------------------|-----|

**Installation | Pin assignment**

|              |   |
|--------------|---|
| Coding       | A |
| No. of poles | 4 |

**Device protection | Electrical**

|                                           |                                      |
|-------------------------------------------|--------------------------------------|
| Installation height max. ASL              | 2000 m                               |
| Degree of protection front (EN IEC 60529) | IP65                                 |
| Degree of protection back (EN IEC 60529)  | IP65, IP67                           |
| Pollution Degree                          | 2                                    |
| Short circuit protective device (SCPD)    | fuse 250 V / 0.1 A / 1.5 kA gG quick |
| Rated insulation voltage                  | 250 V                                |
| Overvoltage category (EN 60950-1)         | II                                   |

**Device protection | Mechanical**

|                                     |              |
|-------------------------------------|--------------|
| Mechanical endurance                | 50000 Cycles |
| Mechanical endurance B10            | 65000 Cycles |
| Operating life B10d                 | 84500 Cycles |
| UL enclosure type rating front side | type 4X      |

**Device protection | Media**

|                                        |     |
|----------------------------------------|-----|
| Salt-spray resistance (IEC 60068-2-11) | yes |
|----------------------------------------|-----|

**Mechanical data**

|                    |          |
|--------------------|----------|
| Can be illuminated | no       |
| Actuating function | latching |
| Color              | red      |
| Color collar       | yellow   |
| Shape collar       | round    |
| Contact type       | 2 Ö      |

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
| Material contact | Gold    |

**Mechanical data | Mounting data**

|                     |               |
|---------------------|---------------|
| Mounting method     | Threaded ring |
| Installation height | 33,4 mm       |
| Mounting depth      | 36,4 mm       |
| Mounting hole       | 30,3 mm       |
| Height              | 30 mm         |
| Width               | 34,5 mm       |
| Depth               | 69,7 mm       |
| Grid min.           | 35 mm         |

**Environmental characteristics | Climatic**

|                                    |        |
|------------------------------------|--------|
| Operating temperature min.         | -40 °C |
| Operating temperature max.         | 85 °C  |
| Derating from                      | 40 °C  |
| Storage temperature min.           | -40 °C |
| Storage temperature max.           | 90 °C  |
| Relative humidity max. (operation) | 93 %   |

**Connection type 1**

|                          |       |
|--------------------------|-------|
| Family construction form | M12   |
| Gender                   | male  |
| Color contact carrier    | black |
| Coding                   | A     |
| No. of poles             | 4     |
| PIN 1                    | NC 1  |
| PIN 2                    | NC 1  |
| PIN 3                    | NC 2  |
| PIN 4                    | NC 2  |