

**LED-INDICATOR OPAC / YELLOW**

LED-230VAC IP65

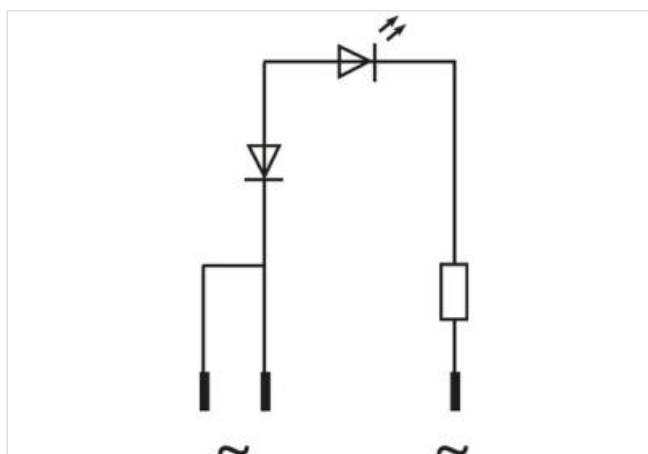
(yellow)

230 V AC

The modules are suitable for wall thickness of 1.5...5.0 mm.

**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27261590      |
| ECLASS-6.1            | 27261501      |
| ECLASS-7.0            | 27261501      |
| ECLASS-8.0            | 27261501      |
| ECLASS-9.0            | 27261501      |
| ECLASS-10.1           | 27261501      |
| ECLASS-11.1           | 27261501      |
| ECLASS-12.0           | 27261501      |
| ETIM-5.0              | EC000272      |
| customs tariff number | 85318070      |
| GTIN                  | 4048879041287 |
| Packaging unit        | 10            |

**Electrical data | Supply**

|                           |       |
|---------------------------|-------|
| Operating voltage AC      | 230 V |
| Operating voltage AC min. | 207 V |
| Operating voltage AC max. | 253 V |
| Current consumption min.  | 8 mA  |
| Current consumption max.  | 12 mA |

**Installation | Connection**

|                        |                   |
|------------------------|-------------------|
| Connection information | Faston 2.8×0.8 mm |
|------------------------|-------------------|

**Device protection | Electrical**

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data**

|              |      |
|--------------|------|
| Diameter LED | 5 mm |
|--------------|------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Mechanical data | Mounting data**

|                               |      |
|-------------------------------|------|
| Diameter front panel drilling | 9 mm |
|-------------------------------|------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 50 °C |
|----------------------------|-------|