

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-10VAC OUT: :24V/15ADC

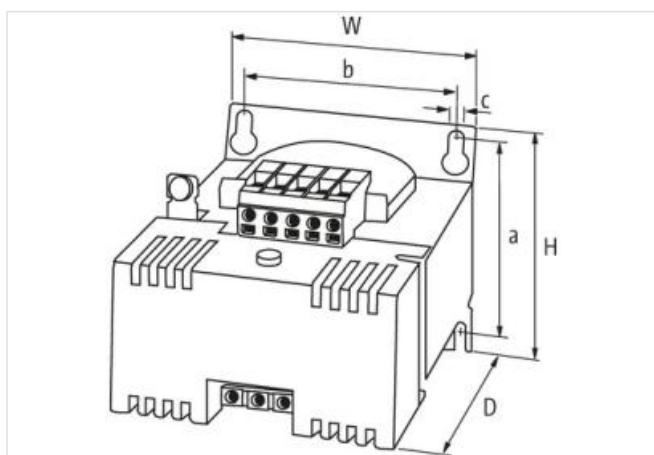
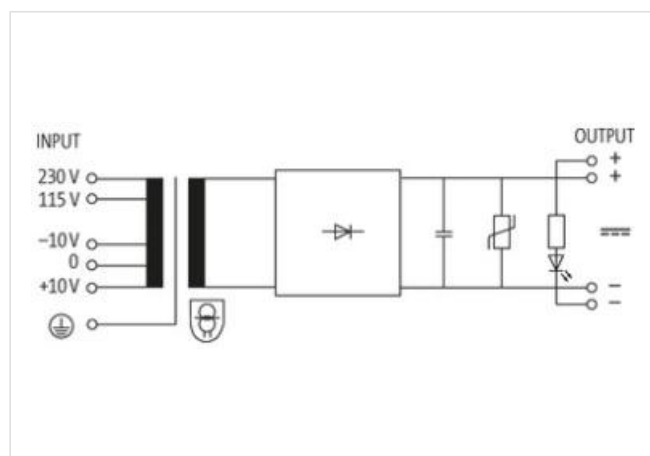
Current: 15 A

Output rating: 360 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

For any mounting position at vertical wall.

Condensation not permitted

Odkaz k produktu**Obrázky**

Výrobok sa môže líšiť od zobrazenia

Commercial data

ECLASS-6.0	27049002
ECLASS-7.0	27049002
ECLASS-8.0	27049002
ECLASS-9.0	27040701
ETIM-5.0	EC002540
customs tariff number	85044095
GTIN	4048879080026
Packaging unit	1

Electrical data

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.
 Zodpovednosť sa obmedzuje hrubou nebanlivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 14.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-8111 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

Security level SELV

Electrical data | Supply

Power frequency 50 ... 60 Hz

Electrical data | Input

Fuse protection 1 primary side external 8 A @115 V AC

Fuse protection 2 primary side external 4 A @230 V AC

Characteristic back-up fuse Inertia

Input voltage 1 AC 115 V

Input voltage 1 AC min. 105 V

Input voltage 1 AC max. 125 V

Input voltage 2 AC 230 V

Input voltage 2 AC min. 220 V

Input voltage 2 AC max. 240 V

Input current at input voltage 1 AC 5,6 A

Input current at input voltage 2 AC 2,8 A

Electrical data | Output

Output suppression LED, Screening capacitor, VDR

Output voltage DC 24 V

Output voltage adjustable no

Output current max. 18 A

Ripple max. 5 %

Mechanical data | Mounting data

Suitable for mounting type Schlüssellochaufhängung

Mounting dimension a 126 mm

Mounting dimension b 104 mm

Mounting dimension c 6,6 mm

Height 138,5 mm

Width 135 mm

Depth 181,5 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C

Derating from 40 °C

Conformity

Product standard EN 61558-2-6, EN 62041 category I

EMC EN 55011 B, EN 61000-3-2

Connection type 3

Connection Screw terminals SK

Family construction form terminal

Gender female

Color contact carrier metallic

No. of poles 1

PIN 1 PE

Connection Screw terminals SK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 4

PIN 1 +

PIN 2 +

PIN 3 -

PIN 4	-
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	5
PIN 1	+ 10 V
PIN 3	- 10 V
PIN 4	230 V
PIN 5	400 V