



MPL POWER SUPPLY 3-PHASE, SMOOTHED

IN: 208-520VAC+/- 5% OUT: 24V/10ADC

Current: 10 A  
Output rating: 240 W  
This power supply units meet the (EN 61000-3-2) standard for harmonic current.  
Any mounting position on vertical wall, condensation not permissible

Odkaz k produktu

Obrázky

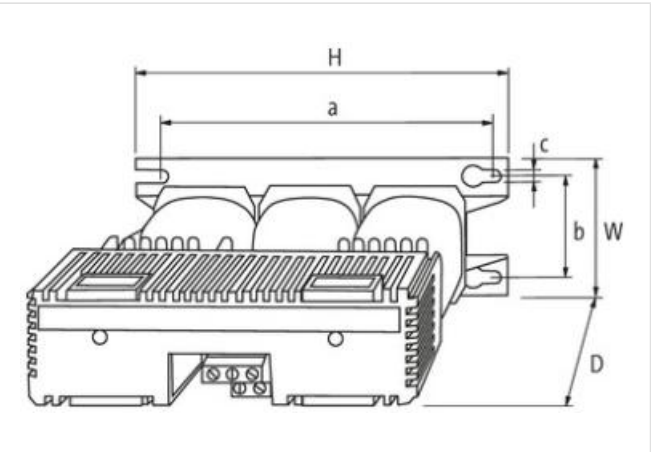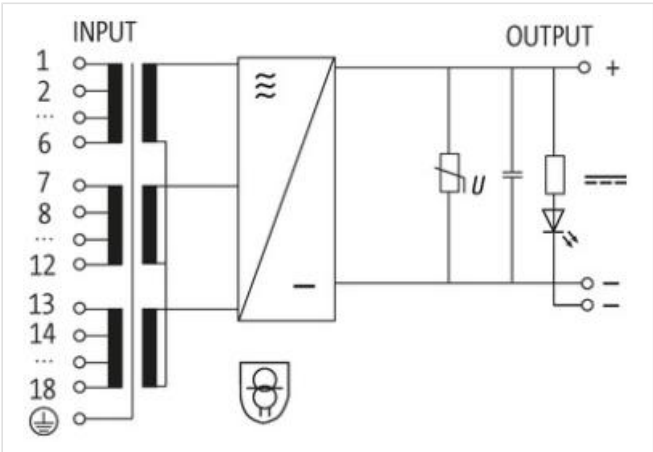

Výrobok sa môže líšiť od zobrazenia



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27049002 |
| ECLASS-6.1      | 27049002 |
| ECLASS-7.0      | 27049002 |
| ECLASS-8.0      | 27049002 |
| ECLASS-9.0      | 27040701 |
| ECLASS-10.1     | 27040701 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27040701      |
| ECLASS-12.0           | 27040701      |
| ETIM-5.0              | EC002540      |
| customs tariff number | 85044095      |
| GTIN                  | 4048879079129 |
| Packaging unit        | 1             |

**Electrical data**

|                |      |
|----------------|------|
| Security level | SELV |
|----------------|------|

**Electrical data | Supply**

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

**Electrical data | Input**

|                       |       |
|-----------------------|-------|
| Input voltage AC min. | 208 V |
| Input voltage AC max. | 520 V |
| Phase number input    | 3     |
| Efficiency            | 73 %  |

**Electrical data | Output**

|                                         |                               |
|-----------------------------------------|-------------------------------|
| Fuse protection secondary side external | 10 A                          |
| Output suppression                      | LED, Screening capacitor, VDR |
| Output voltage DC                       | 24 V                          |
| Output voltage adjustable               | no                            |
| Output current max.                     | 10 A                          |
| Characteristic secondary fuse           | Inertia                       |
| Ripple max.                             | 2 %                           |

**Mechanical data | Mounting data**

|                            |                        |
|----------------------------|------------------------|
| Suitable for mounting type | Schlüssellochauhängung |
| Mounting dimension a       | 164 mm                 |
| Mounting dimension b       | 71,5 mm                |
| Mounting dimension c       | 6,5 mm                 |
| Height                     | 185 mm                 |
| Width                      | 91,5 mm                |
| Depth                      | 188 mm                 |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 55 °C  |

**Conformity**

|                  |                                   |
|------------------|-----------------------------------|
| Product standard | EN 61558-2-6, EN 62041 category I |
| EMC              | EN 55011 B, EN 61000-3-2          |