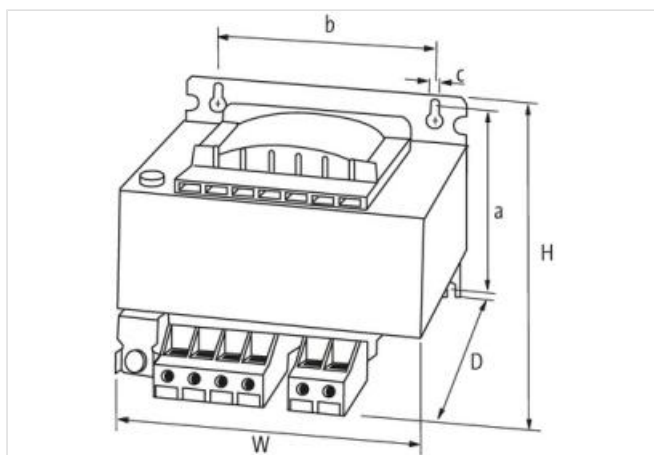
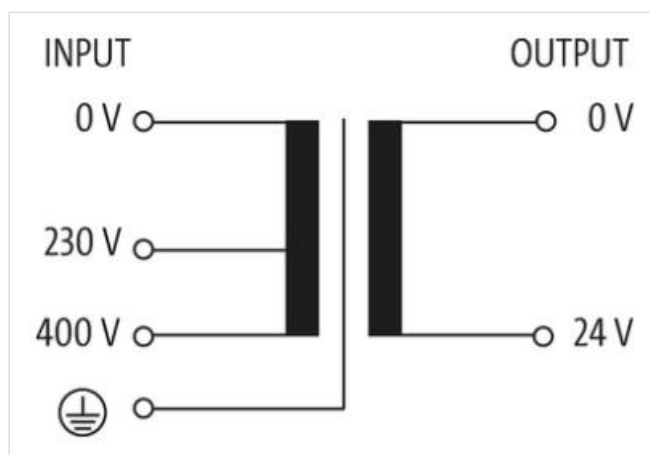


**MST 1-PHASE SAFETY TRANSFORMER**

P: 400VA IN: 230/400VAC OUT: 24VAC

Single-phase safety transformer  
 400 VA  
 Isolation class T 40/B  
 Other voltages on request.

[Odkaz k produktu](#)
**Obrázky**


Výrobok sa môže líšiť od zobrazenia


**Commercial data**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27031302 |
| ECLASS-6.1  | 27031302 |
| ECLASS-7.0  | 27031302 |
| ECLASS-8.0  | 27031302 |
| ECLASS-9.0  | 27031302 |
| ECLASS-10.1 | 27031302 |

|                                                 |                                                 |
|-------------------------------------------------|-------------------------------------------------|
| ECLASS-11.1                                     | 27031302                                        |
| ECLASS-12.0                                     | 27031302                                        |
| ETIM-5.0                                        | EC002486                                        |
| customs tariff number                           | 85043180                                        |
| GTIN                                            | 4048879078603                                   |
| Packaging unit                                  | 1                                               |
| <b>Electrical data</b>                          |                                                 |
| Security level                                  | SELV                                            |
| <b>Electrical data   Supply</b>                 |                                                 |
| Power frequency                                 | 50 ... 60 Hz                                    |
| <b>Electrical data   Input</b>                  |                                                 |
| Input voltage 1 AC                              | 230 V                                           |
| Input voltage 2 AC                              | 400 V                                           |
| Input current at input voltage 1 AC             | 1,95 A                                          |
| Input current at input voltage 2 AC             | 1,1 A                                           |
| Inrush current at input voltage 1               | 52,3 A                                          |
| Inrush current at input voltage 2               | 30,2 A                                          |
| Short-circuit current at input voltage 1        | 43 A                                            |
| Short-circuit current at input voltage 2        | 24,9 A                                          |
| <b>Electrical data   Output</b>                 |                                                 |
| Output voltage AC                               | 24 V                                            |
| Output voltage adjustable                       | no                                              |
| Power rating AC max.                            | 400 VA                                          |
| <b>Device protection   Electrical</b>           |                                                 |
| Insulation test voltage input - output          | 4 kV                                            |
| <b>Mechanical data   Mounting data</b>          |                                                 |
| Suitable for mounting type                      | Schlüssellochabhängung                          |
| Mounting dimension a                            | 86,5 mm                                         |
| Mounting dimension b                            | 90 mm                                           |
| Mounting dimension c                            | 5,8 mm                                          |
| Height                                          | 104 mm                                          |
| Width                                           | 120 mm                                          |
| Depth                                           | 123 mm                                          |
| Diameter bore                                   | 5,8 mm                                          |
| Length bore                                     | 10 mm                                           |
| <b>Environmental characteristics   Climatic</b> |                                                 |
| Operating temperature min.                      | -20 °C                                          |
| Operating temperature max.                      | 40 °C                                           |
| Storage temperature min.                        | -40 °C                                          |
| Storage temperature max.                        | 80 °C                                           |
| <b>Conformity</b>                               |                                                 |
| Product standard                                | EN 61558-2-4, EN 61558-2-6, EN 62041 category 0 |