

## Cube67 Valve-Interface, I/O Extension Module

DO16, Parker series V, Multipol 17 pol., 0,5m

Expansion module

DO16 - Valve (E) 0.5 m

Multipole plug (70 mA)


PARKER - Series V

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

### Odkaz k produktu

#### Obrázky

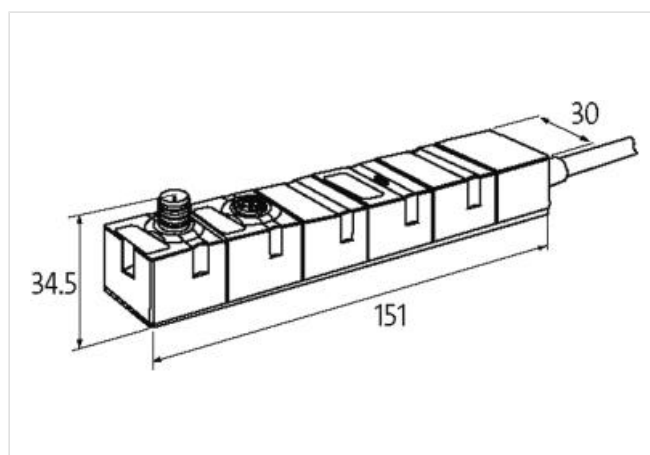

Výrobok sa môže líšiť od zobrazenia



#### Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27242604      |
| ECLASS-6.1            | 27242604      |
| ECLASS-7.0            | 27242604      |
| ECLASS-8.0            | 27242604      |
| ECLASS-9.0            | 27242604      |
| ECLASS-10.1           | 27242604      |
| ECLASS-11.1           | 27242604      |
| ECLASS-12.0           | 27242604      |
| ETIM-5.0              | EC001599      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879045261 |
| Packaging unit        | 1             |

#### Electrical data | Supply

|                          |            |
|--------------------------|------------|
| Norm operating voltage   | EN 61131-2 |
| Operating voltage UA DC  | 24 V       |
| Current consumption max. | 50 mA      |
| Total current UA max.    | 4 A        |
| Total current US max.    | 4 A        |

#### Electrical data | Output

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.  
Zodpovednosť sa obmedzuje hrubou nebanalivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 18.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

|                             |        |
|-----------------------------|--------|
| Overload resistant          | yes    |
| Short-circuit protected     | yes    |
| Output current per pin max. | 0,05 A |

#### Diagnostics

|                         |                                  |
|-------------------------|----------------------------------|
| Actuator warning        | per channel via BUS              |
| Diagnostic              | No voltage, Under voltage        |
| Diagnostic via BUS      | per module and channel           |
| Diagnostic via LED      | per module                       |
| Short circuit diagnosis | yes                              |
| LED display             | Ethernet connection/data traffic |
| Overload diagnosis      | yes                              |

#### Device protection | Electrical

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP67 |
|-------------------------------------|------|

#### Mechanical data | Mounting data

|                            |                       |
|----------------------------|-----------------------|
| Suitable for mounting type | 2-hole screw mounting |
| Height                     | 150 mm                |
| Width                      | 30 mm                 |
| Depth                      | 34,5 mm               |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | 0 °C   |
| Operating temperature max. | 55 °C  |
| Storage temperature min.   | -20 °C |
| Storage temperature max.   | 75 °C  |

#### Connection type 3

|                          |                      |
|--------------------------|----------------------|
| Connection type 1        | Bus In               |
| Connection type 2        | Bus Out              |
| Connection type 3        | Data                 |
| Family construction form | M12                  |
| Gender                   | male                 |
| Color contact carrier    | black                |
| Coding                   | A                    |
| No. of poles             | 6                    |
| PIN 1                    | 24 V DC (UA)         |
| PIN 2                    | 24 V DC (US)         |
| PIN 3                    | 0 V                  |
| PIN 4                    | Bus internal         |
| PIN 5                    | Bus internal         |
| PIN 6                    | 0 V                  |
| Family construction form | M12                  |
| Gender                   | female               |
| Color contact carrier    | black                |
| Coding                   | A                    |
| No. of poles             | 6                    |
| PIN 1                    | 24 V DC (UA)         |
| PIN 2                    | 24 V DC (US)         |
| PIN 3                    | 0 V                  |
| PIN 4                    | Bus internal         |
| PIN 5                    | Bus internal         |
| PIN 6                    | 0 V                  |
| Connection               | Plug-in terminals RK |
| Family construction form | terminal             |
| Gender                   | female               |

|              |        |
|--------------|--------|
| No. of poles | 18     |
| PIN 1        | Out 1  |
| PIN 2        | Out 2  |
| PIN 3        | Out 3  |
| PIN 4        | Out 4  |
| PIN 5        | Out 5  |
| PIN 6        | Out 6  |
| PIN 7        | Out 7  |
| PIN 8        | Out 8  |
| PIN 9        | Out 9  |
| PIN 10       | Out 10 |
| PIN 11       | Out 11 |
| PIN 12       | Out 12 |
| PIN 13       | Out 13 |
| PIN 14       | Out 14 |
| PIN 15       | Out 15 |
| PIN 16       | Out 16 |
| PIN 17       | 0 V    |