

Set T-Coupler M12 male/2xM12 female+T-Coupler Holder




7000-41121-0000000 + 7000-99831-0000000

Set consists of:

1 × 7000-99831-0000000  
good resistance to oil and chemicals  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Odkaz k produktu

Obrázky

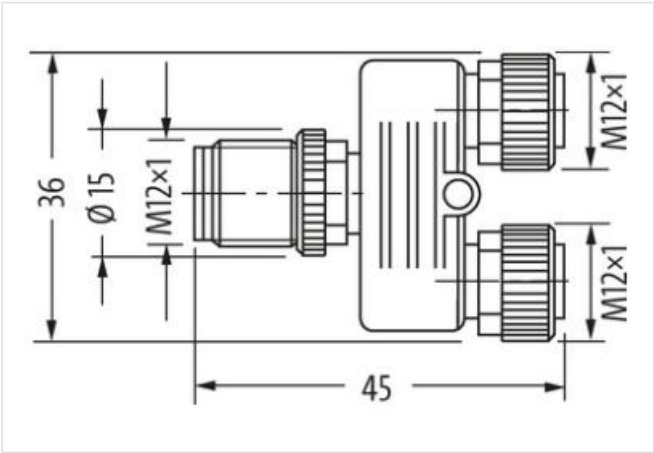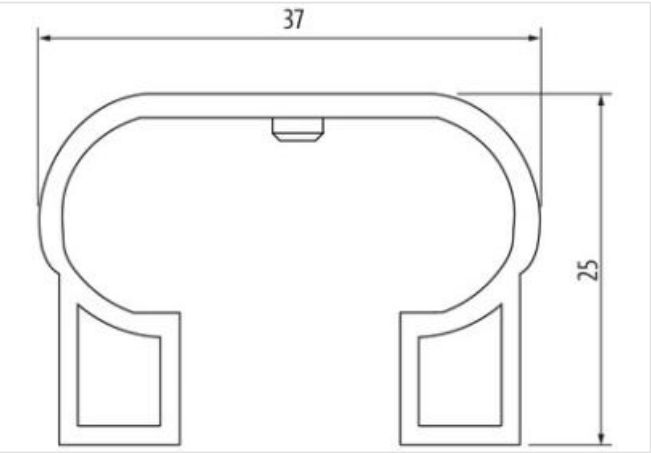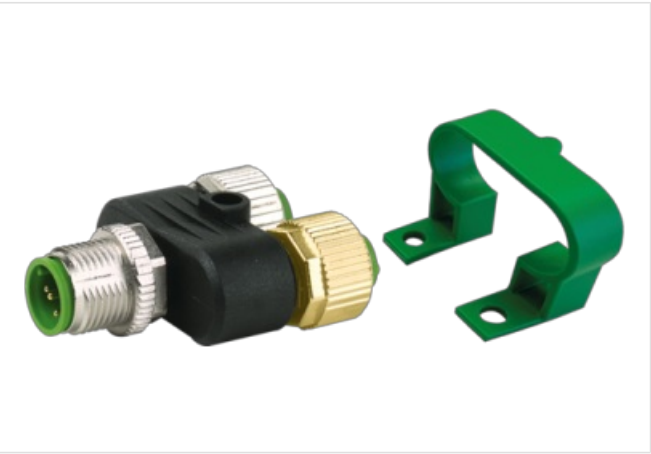

Výrobok sa môže líšiť od zobrazenia

| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27279218 |
| ECLASS-6.1      | 27279221 |
| ECLASS-7.0      | 27440104 |
| ECLASS-8.0      | 27440104 |
| ECLASS-9.0      | 27440106 |
| ECLASS-10.1     | 27440106 |
| ECLASS-11.1     | 27440106 |
| ECLASS-12.0     | 27440106 |
| ETIM-5.0        | EC001855 |

|                                                 |                                       |
|-------------------------------------------------|---------------------------------------|
| customs tariff number                           | 85366990                              |
| GTIN                                            | 4048879857222                         |
| Packaging unit                                  | 1                                     |
| <b>Electrical data   Supply</b>                 |                                       |
| Operating voltage AC max.                       | 60 V                                  |
| Operating voltage DC max.                       | 60 V                                  |
| Operating voltage AC (UL-listed)                | 30 V                                  |
| Operating voltage DC (UL-listed)                | 30 V                                  |
| Current operating per contact max.              | 4 A                                   |
| <b>Installation   Connection</b>                |                                       |
| Tightening torque                               | 0,6 Nm                                |
| Mounting set                                    | M12 x 1                               |
| <b>Device protection   Electrical</b>           |                                       |
| Degree of protection (EN IEC 60529)             | IP67                                  |
| Additional condition protection degree          | inserted, screwed                     |
| Pollution Degree                                | 3                                     |
| Rated surge voltage                             | 1,5 kV                                |
| Material group (IEC 60664-1)                    | I                                     |
| <b>Mechanical data   Material data</b>          |                                       |
| Coating locking                                 | Nickel                                |
| Locking material                                | Zinc die-casting                      |
| <b>Mechanical data   Mounting data</b>          |                                       |
| Mounting method                                 | inserted, screwed, Shaking protection |
| <b>Environmental characteristics   Climatic</b> |                                       |
| Operating temperature min.                      | -25 °C                                |
| Operating temperature max.                      | 85 °C                                 |