

## SIEMENS CONTACTOR SUPPRESSOR

Varistor, 230VAC/DC



230 V AC/DC

VDR

For other configurations and voltages, please inquire.

### [Odkaz k produktu](#)

#### Obrázky

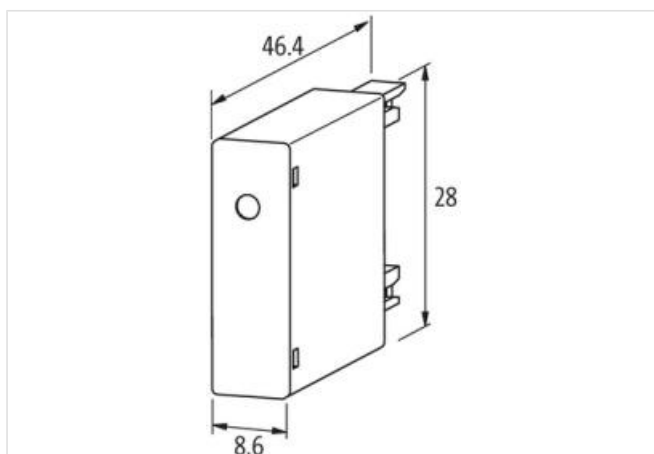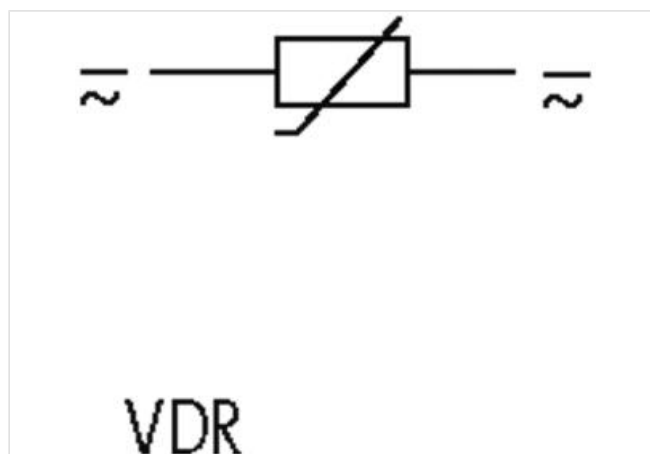

Výrobok sa môže líšiť od zobrazenia



#### Commercial data

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371013 |
| ECLASS-6.1  | 27371013 |
| ECLASS-7.0  | 27371013 |
| ECLASS-8.0  | 27371013 |
| ECLASS-9.0  | 27371013 |
| ECLASS-10.1 | 27371013 |

|                                                 |                     |
|-------------------------------------------------|---------------------|
| ECLASS-11.1                                     | 27371013            |
| ECLASS-12.0                                     | 27371013            |
| ETIM-5.0                                        | EC002498            |
| customs tariff number                           | 85363010            |
| GTIN                                            | 4048879010665       |
| Packaging unit                                  | 1                   |
| <b>Compatibility   Compatible with</b>          |                     |
| Appropriate contactors                          | 3 RT 20.15/16/17/18 |
| <b>Electrical data</b>                          |                     |
| Damping factor                                  | 1.5× UN             |
| <b>Electrical data   Input</b>                  |                     |
| Input voltage AC min.                           | 127 V               |
| Input voltage AC max.                           | 250 V               |
| Input voltage DC min.                           | 127 V               |
| Input voltage DC max.                           | 250 V               |
| <b>Installation   Connection</b>                |                     |
| Connection information                          | Plug contact        |
| <b>Device protection   Media</b>                |                     |
| Flame resistance                                | flame retardant     |
| <b>Mechanical data   Material data</b>          |                     |
| Combustibility class housing (UL94)             | V-0                 |
| Material housing                                | Plastic             |
| <b>Mechanical data   Mounting data</b>          |                     |
| Height                                          | 46,4 mm             |
| Width                                           | 28 mm               |
| Depth                                           | 8,6 mm              |
| <b>Environmental characteristics   Climatic</b> |                     |
| Operating temperature min.                      | -20 °C              |
| Operating temperature max.                      | 70 °C               |