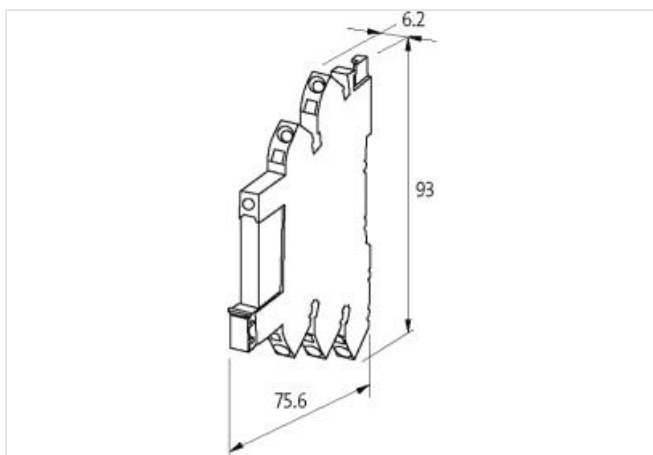
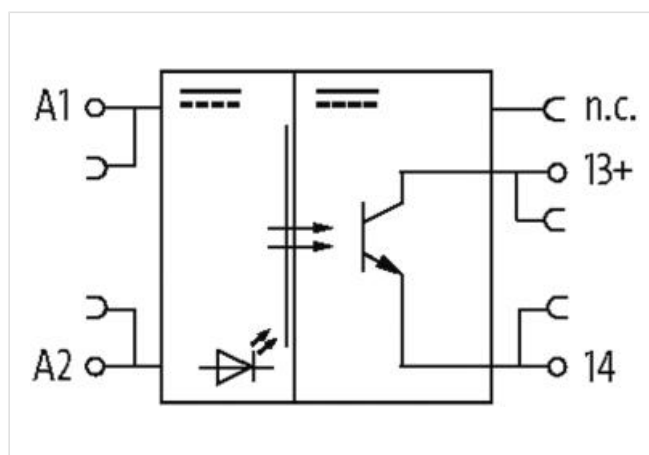


**MIRO 6.2 pluggable compl. Module Optocoupler**

IN: 24 VDC - OUT: 24 VDC / 6 A

Transistor 6 A  
24 V DC  
Spring clamp terminals  
Complete module

**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371604 |
| ECLASS-6.1  | 27371604 |
| ECLASS-7.0  | 27371604 |
| ECLASS-8.0  | 27371604 |
| ECLASS-9.0  | 27371604 |
| ECLASS-10.1 | 27371604 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27371604      |
| ECLASS-12.0           | 27371604      |
| ETIM-5.0              | EC001504      |
| customs tariff number | 85365005      |
| GTIN                  | 4048879532747 |
| Packaging unit        | 1             |

**Electrical data | Input**

|                       |      |
|-----------------------|------|
| Input voltage DC      | 24 V |
| Input voltage DC min. | 18 V |
| Input voltage DC max. | 30 V |
| Input current         | 9 mA |

**Electrical data | Output**

|                                    |            |
|------------------------------------|------------|
| Switch off delay max.              | 31 $\mu$ s |
| Forward voltage max.               | 240 mV     |
| Switching frequency inductive max. | 50 Hz      |
| Switching frequency ohmic max.     | 500 Hz     |
| Voltage switching DC min.          | 3 V        |
| Switching voltage DC max.          | 30 V       |
| Switching current min.             | 10 mA      |
| Switching current max.             | 6 A        |

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Device protection | Electrical**

|                                     |        |
|-------------------------------------|--------|
| Degree of protection (EN IEC 60529) | IP20   |
| Rated insulation voltage            | 50 V   |
| Rated surge voltage                 | 2,5 kV |

**Mechanical data | Mounting data**

|                 |          |
|-----------------|----------|
| Mounting method | inserted |
| Height          | 93 mm    |
| Width           | 6,2 mm   |
| Depth           | 75,6 mm  |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 50 °C  |