

## MSDD pass-through RJ45 CAT5e femal/femal, design black




Neutral lid without logo



Pass-through

1 × RJ45, 8-pole CAT5e (female/female)

### [Odkaz k produktu](#)

#### Obrázky

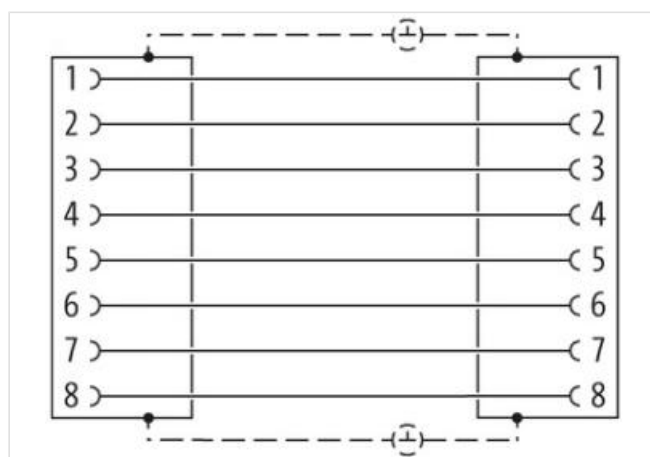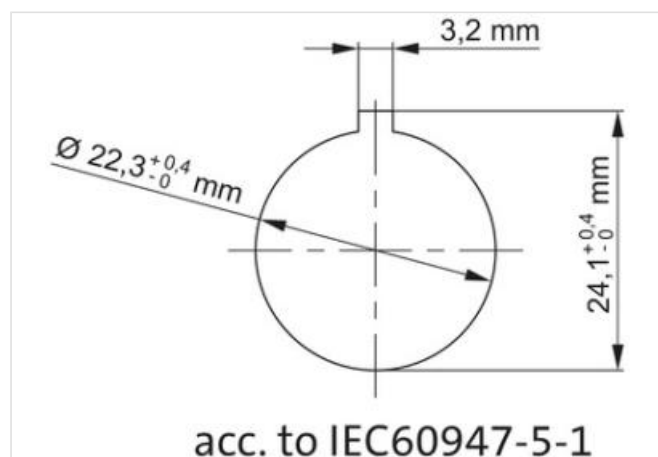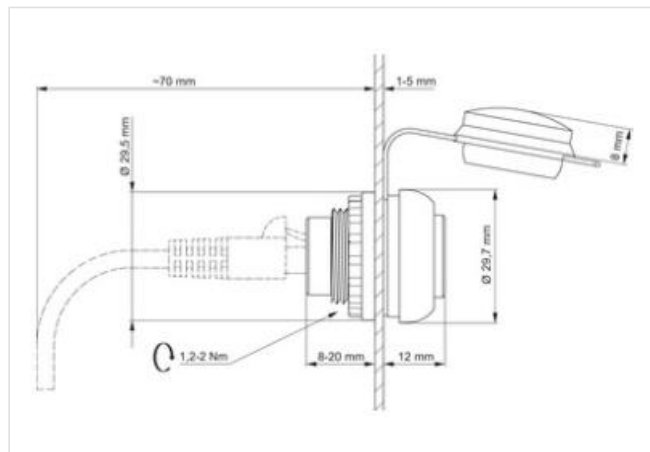

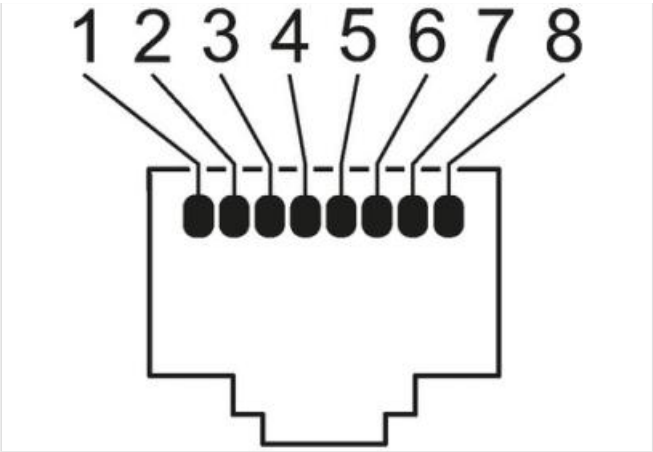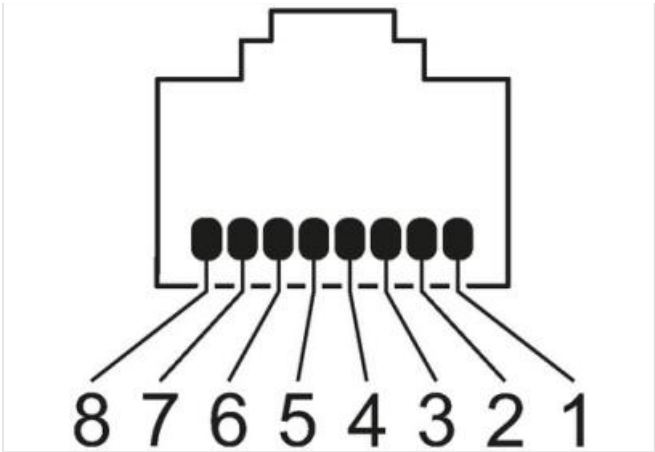

Výrobok sa môže líšiť od zobrazenia



| Commercial data                        |                           |
|----------------------------------------|---------------------------|
| ECLASS-6.0                             | 27143423                  |
| ECLASS-6.1                             | 27143419                  |
| ECLASS-7.0                             | 27440515                  |
| ECLASS-8.0                             | 27440515                  |
| ECLASS-9.0                             | 27440515                  |
| ECLASS-10.1                            | 27440515                  |
| ECLASS-11.1                            | 27440515                  |
| ECLASS-12.0                            | 27440515                  |
| ETIM-5.0                               | EC002625                  |
| customs tariff number                  | 85366990                  |
| GTIN                                   | 4065909035931             |
| Packaging unit                         | 1                         |
| Electrical data   Supply               |                           |
| Operating voltage AC                   | 24 V                      |
| Operating voltage DC                   | 24 V                      |
| Operating current max.                 | 1,5 A                     |
| Installation   Connection              |                           |
| Family construction form               | RJ46                      |
| Gender                                 | female                    |
| Gender Rear                            | female                    |
| Cable category min.                    | Cat5e                     |
| Device protection                      |                           |
| Shielded                               | yes                       |
| Device protection   Electrical         |                           |
| Degree of protection (EN IEC 60529)    | IP20, IP65                |
| Protection NEMA                        | 2, 3R, 4, 12, 13, 4x      |
| Additional condition protection degree | inserted, in closed state |
| Device protection   Mechanical         |                           |
| Mechanical endurance                   | 750 Cycles                |
| Mechanical data   Mounting data        |                           |
| Diameter cutout                        | 22,5 mm                   |

|          |         |
|----------|---------|
| Diameter | 29,5 mm |
|----------|---------|

|                |       |
|----------------|-------|
| Mounting depth | 70 mm |
|----------------|-------|

|       |       |
|-------|-------|
| Depth | 20 mm |
|-------|-------|

**Approvals**

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|