

**AIDA PUSH PULL COUPLING HAN24**

with power (5 pole) spring clamp + RJ45 fem/fem

with RJ45 and energy

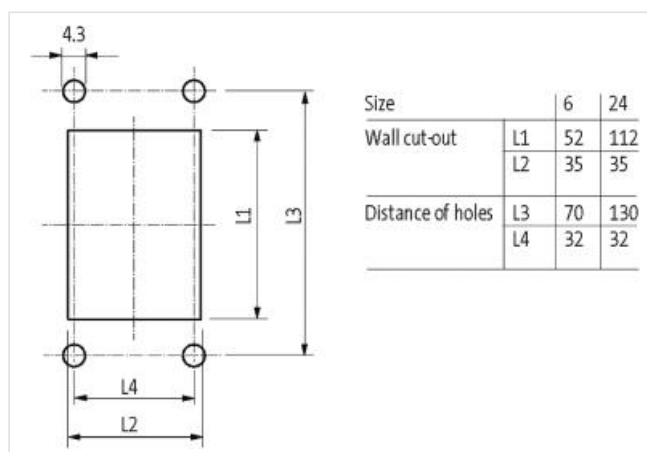
1 × RJ45, 8-pole metal, CAT5e (female/female)

Combicon Power/spring clamp terminal, Push Pull

Size 24

**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143423      |
| ECLASS-6.1            | 27143423      |
| ECLASS-7.0            | 27449001      |
| ECLASS-8.0            | 27449001      |
| ECLASS-9.0            | 27440321      |
| ECLASS-10.1           | 27440321      |
| ECLASS-11.1           | 27440321      |
| ECLASS-12.0           | 27440321      |
| ETIM-5.0              | EC002625      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879031165 |
| Packaging unit        | 1             |

**Device protection | Electrical**

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

**Mechanical data | Material data**

|                  |    |
|------------------|----|
| Material housing | PA |
|------------------|----|

**Mechanical data | Mounting data**

|        |        |
|--------|--------|
| Height | 146 mm |
| Width  | 58 mm  |
| Depth  | 65 mm  |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 70 °C  |