

AIDA PUSH PULL COUPLING HAN24

with 2 x power (5 pole) spring clamp


2× Combicon Power/spring clamp terminal, Push Pull
Size 24

Odkaz k produktu

Obrázky



Výrobok sa môže líšiť od zobrazenia

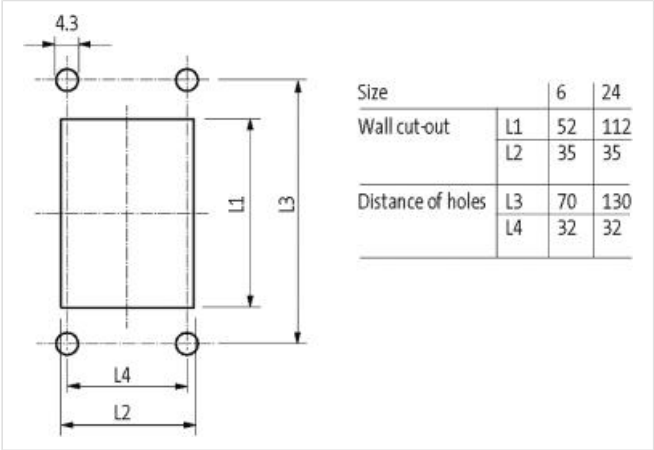

Commercial data	
ECLASS-6.0	27143423
ECLASS-6.1	27143423
ECLASS-7.0	27449001
ECLASS-8.0	27449001
ECLASS-9.0	27440321
ECLASS-10.1	27440321
ECLASS-11.1	27440321
ECLASS-12.0	27440321
ETIM-5.0	EC002625
customs tariff number	85366990
GTIN	4048879346559
Packaging unit	1
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65
Mechanical data Material data	
Material housing	PA
Mechanical data Mounting data	
Height	146 mm
Width	58 mm
Depth	65 mm
Environmental characteristics Climatic	

Operating temperature min.	-25 °C
Operating temperature max.	70 °C