

## SIGNAL TOWER MODLIGHT30 EQUIPPED WITH LED MODULES

Green,amber,red with 4 pole M12 connection

Connection module + LED modules


green, yellow, red

with M12 connection

Connection cables are in the online shop under "Connection Technology".

### [Odkaz k produktu](#)

#### Obrázky

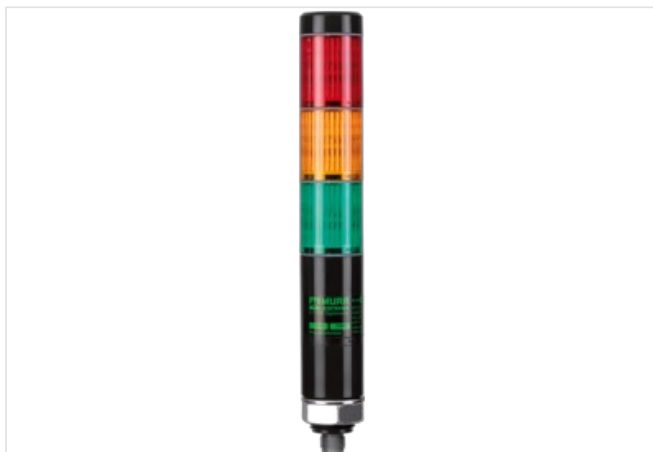

Výrobok sa môže líšiť od zobrazenia



#### Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27371230      |
| ECLASS-6.1            | 27371230      |
| ECLASS-7.0            | 27371230      |
| ECLASS-8.0            | 27371230      |
| ECLASS-9.0            | 27371230      |
| ECLASS-10.1           | 27371230      |
| ECLASS-11.1           | 27371230      |
| ECLASS-12.0           | 27371230      |
| ETIM-5.0              | EC001042      |
| customs tariff number | 85318070      |
| GTIN                  | 4048879496896 |
| Packaging unit        | 1             |

#### Electrical data | Supply

|                          |       |
|--------------------------|-------|
| Operating voltage AC     | 24 V  |
| Operating voltage DC     | 24 V  |
| Current consumption max. | 85 mA |

#### Device protection | Electrical

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

#### Mechanical data | Material data

|               |       |
|---------------|-------|
| Color housing | black |
|---------------|-------|

Material housing Plastic

**Mechanical data | Mounting data**

|        |        |
|--------|--------|
| Height | 30 mm  |
| Width  | 30 mm  |
| Depth  | 213 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |

**Connection type 1**

|                          |      |
|--------------------------|------|
| Family construction form | M12  |
| Gender                   | male |
| Coding                   | A    |
| No. of poles             | 4    |
| PIN 1                    | GN   |
| PIN 2                    | RD   |
| PIN 3                    | COM  |
| PIN 4                    | YE   |