

**Bus terminating plug M12 male A-cod.**

Devicenet

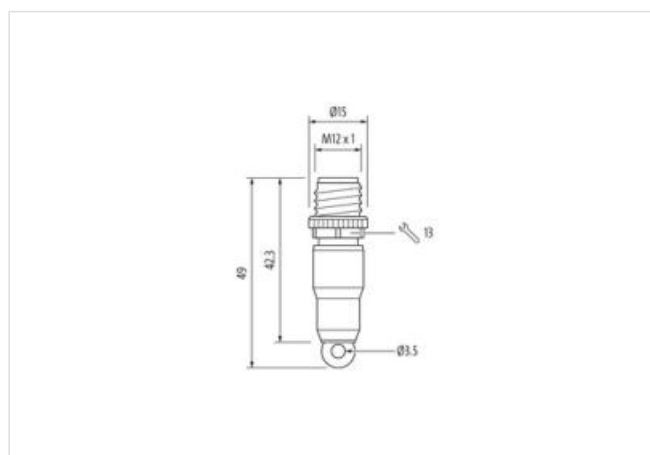
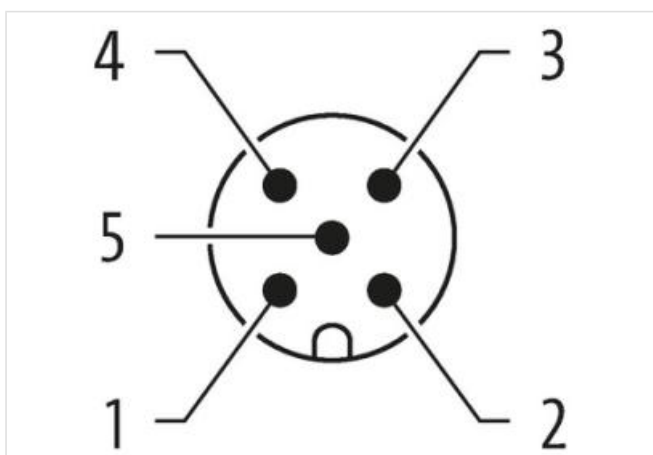
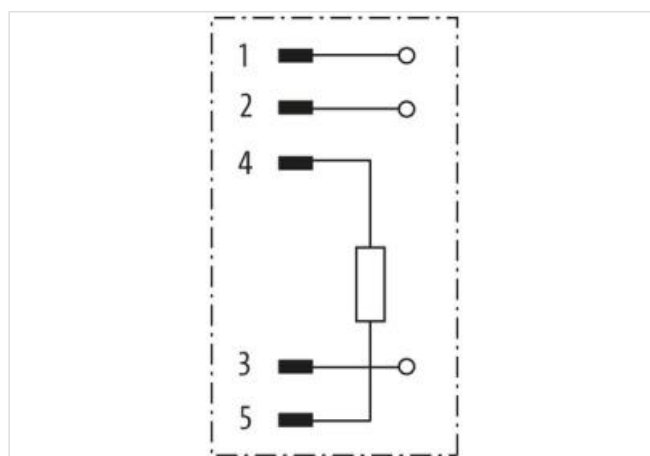
DeviceNet, CANopen

Terminating resistor



Male

M12 – M12, 5-pole (circuit diagram)

A-coded

**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Side 1**

|                                     |      |
|-------------------------------------|------|
| Family construction form            | M12  |
| No. of poles                        | 5    |
| Width across flats                  | SW13 |
| Degree of protection (EN IEC 60529) | IP67 |

**Commercial data**

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.  
Zodpovednosť sa obmedzuje hrubou nebanalivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 03.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 19070403      |
| ECLASS-6.1            | 27260702      |
| ECLASS-7.0            | 27440390      |
| ECLASS-8.0            | 27440190      |
| ECLASS-9.0            | 27440190      |
| ECLASS-10.1           | 27440190      |
| ECLASS-11.1           | 27440190      |
| ECLASS-12.0           | 27440190      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85332100      |
| GTIN                  | 4048879198769 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                       |      |
|---------------------------------------|------|
| Operating voltage DC max.             | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

**Installation | Connection**

|                   |        |
|-------------------|--------|
| Tightening torque | 0,6 Nm |
|-------------------|--------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickel           |
| Material housing | PUR              |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |