

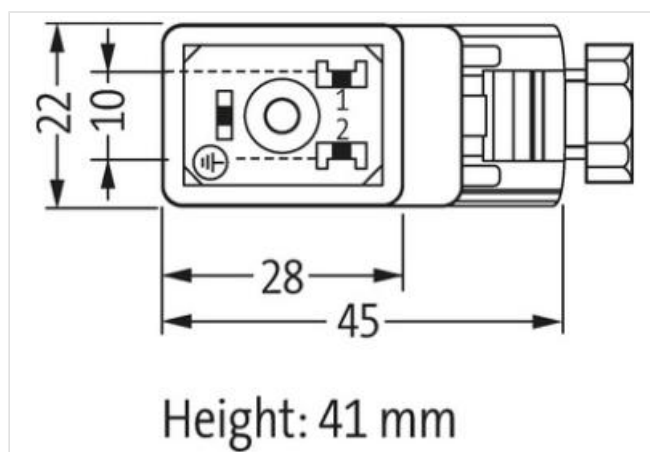
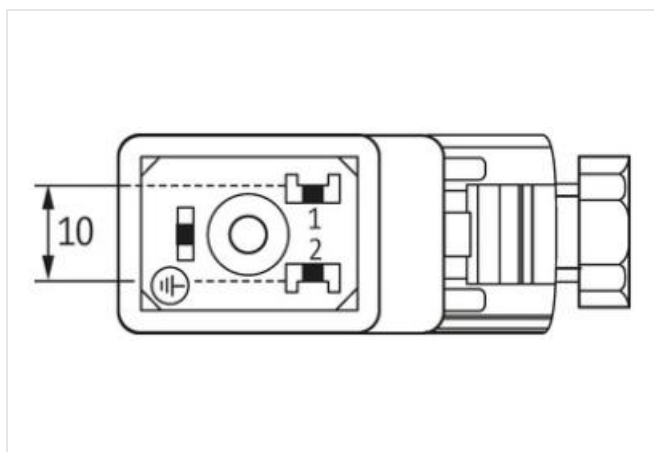
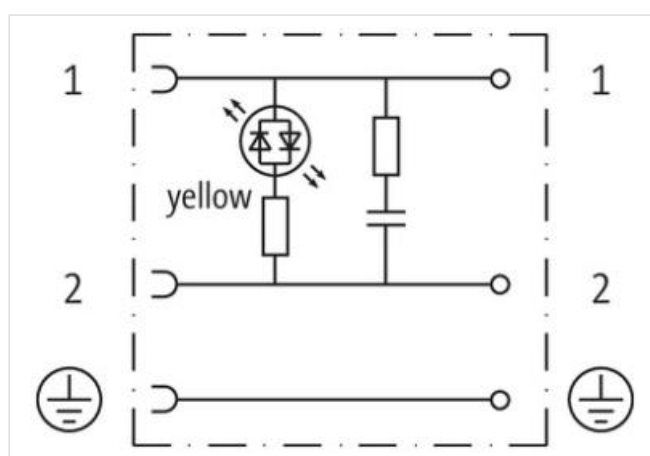
**SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE**

24V LED+RC PG9

Form B (10 mm)  
 24 V AC/DC  $\pm 25\%$   
 LED and RC  
 PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**Odkaz k produktu**
**Obrázky**


Výrobok sa môže líšiť od zobrazenia

**Side 1**

Degree of protection (EN IEC 60529)

IP65

**Commercial data**

|                       |          |
|-----------------------|----------|
| ECLASS-6.0            | 27279221 |
| ECLASS-7.0            | 27440104 |
| ECLASS-8.0            | 27440104 |
| ECLASS-9.0            | 27440102 |
| ETIM-5.0              | EC002062 |
| customs tariff number | 85366990 |

GTIN 4048879187312

Packaging unit 1

**Electrical data | Supply**

Operating voltage AC 24 V

Operating voltage AC min. 18 V

Operating voltage AC max. 30 V

Operating voltage DC 24 V

Operating voltage DC min. 18 V

Operating voltage DC max. 30 V

Current operating per contact max. 2 A

**Installation | Connection**

Tightening torque 0,4 Nm

Mounting set M3

**Installation | Pin assignment**

No. of poles 2 + PE

**Device protection | Electrical**

Additional condition protection degree inserted, screwed

**Environmental characteristics | Climatic**

Operating temperature min. -20 °C

Operating temperature max. 60 °C