

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

110V LED+VDR M16x1.5

Form B (10 mm)

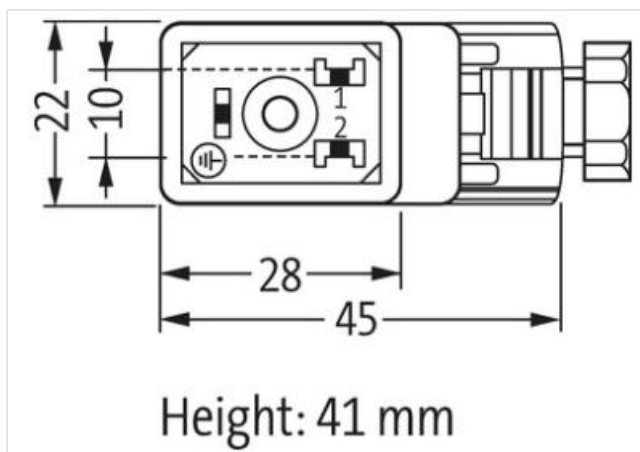
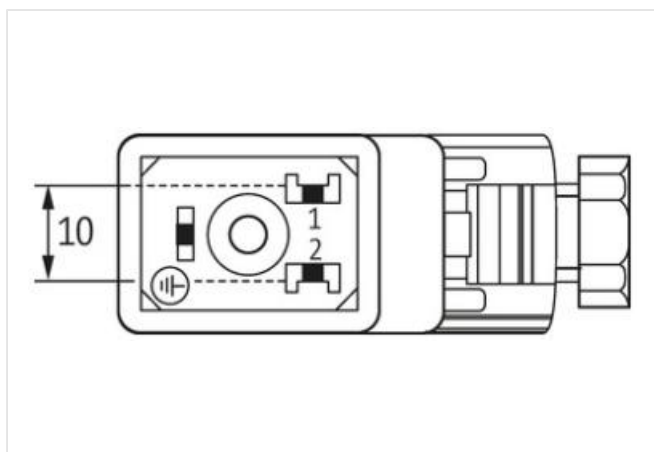
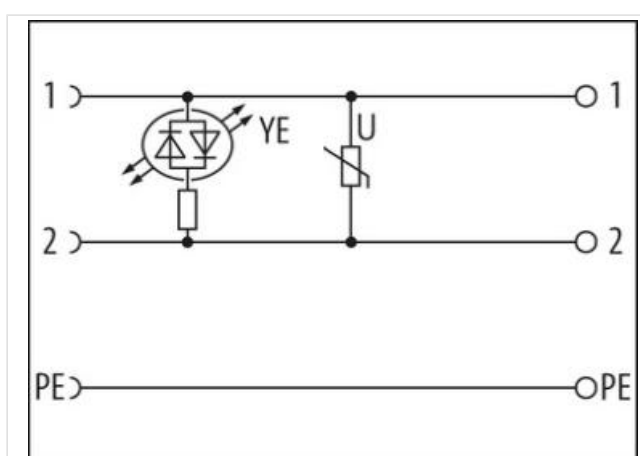
110 V AC/DC $\pm 10\%$

LED and VDR

metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Odkaz k produktu**Obrázky**

Výrobok sa môže líšiť od zobrazenia

Side 1

Degree of protection (EN IEC 60529)

IP65

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN	4048879187305
Packaging unit	1
Electrical data	
Capacity CX	10 ms
Holding power max.	100 W
Electrical data Supply	
Operating voltage AC	110 V
Operating voltage AC min.	99 V
Operating voltage AC max.	121 V
Operating voltage DC	110 V
Operating voltage DC min.	99 V
Operating voltage DC max.	121 V
Cut-off peak voltage max.	250 V
Current operating per contact max.	1 A
Current consumption max.	12 mA
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section max.	1,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Mounting set	M16 x 1.5
Device protection Electrical	
Additional condition protection degree	inserted, locked, with screw connection
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	5 mm
Clamping range max.	10 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C