

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

230V LED+VDR M16x1.5

Form B (10 mm)

230 V AC/DC $\pm 10\%$

LED and VDR




metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Odkaz k produktu

Obrázky

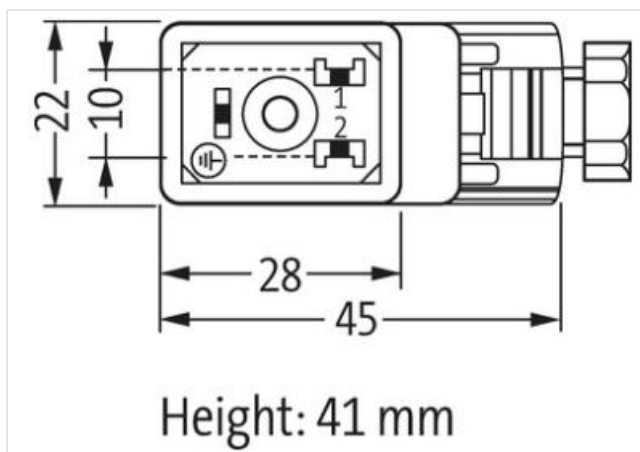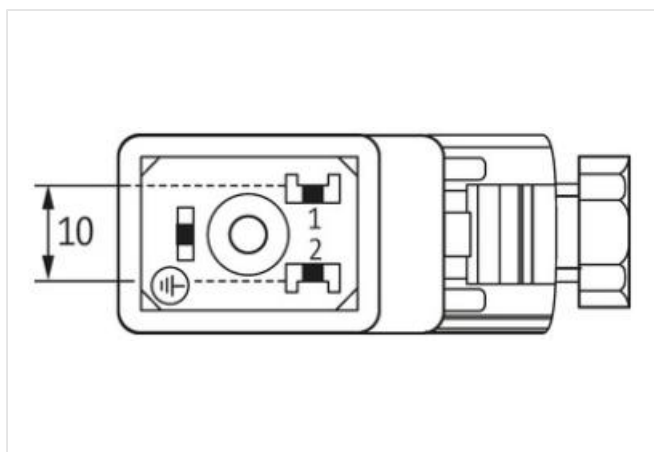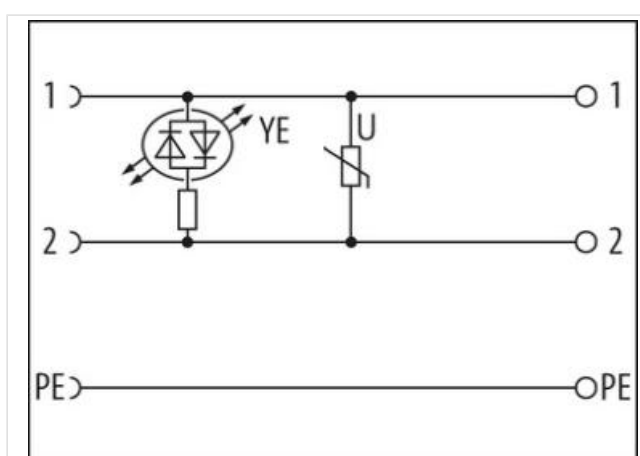

Výrobok sa môže líšiť od zobrazenia

Side 1

Degree of protection (EN IEC 60529)

IP65

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN	4048879187275
------	---------------

Packaging unit	1
----------------	---

Electrical data

Capacity CX	15 ms
-------------	-------

Holding power max.	100 W
--------------------	-------

Electrical data | Supply

Operating voltage AC	230 V
----------------------	-------

Operating voltage AC min.	207 V
---------------------------	-------

Operating voltage AC max.	253 V
---------------------------	-------

Operating voltage DC	230 V
----------------------	-------

Operating voltage DC min.	207 V
---------------------------	-------

Operating voltage DC max.	253 V
---------------------------	-------

Cut-off peak voltage max.	450 V
---------------------------	-------

Current operating per contact max.	1 A
------------------------------------	-----

Current consumption max.	12 mA
--------------------------	-------

Diagnostics

Status indication LED	yellow
-----------------------	--------

Installation

Connection cross section max.	1,5 mm ²
-------------------------------	---------------------

Installation | Connection

Tightening torque	0,4 Nm
-------------------	--------

Mounting set	M16 x 1.5
--------------	-----------

Device protection | Electrical

Additional condition protection degree	inserted, locked, with screw connection
--	---

Mechanical data | Mounting data

fastening screw	M3
-----------------	----

Clamping range min.	5 mm
---------------------	------

Clamping range max.	10 mm
---------------------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------