

SVS VALVE PLUG FORM BI 11MM FIELD-WIREABLE




230V LED+VDR PG9

Form BI (11 mm)
230 V AC/DC ±10%
LED and RC
PG9

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Odkaz k produktu

Obrázky

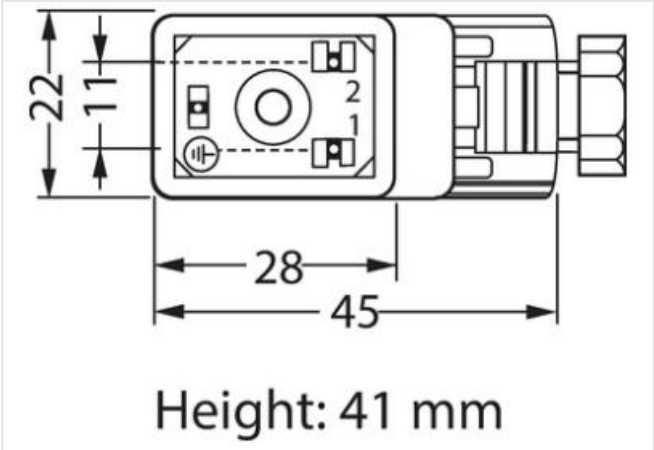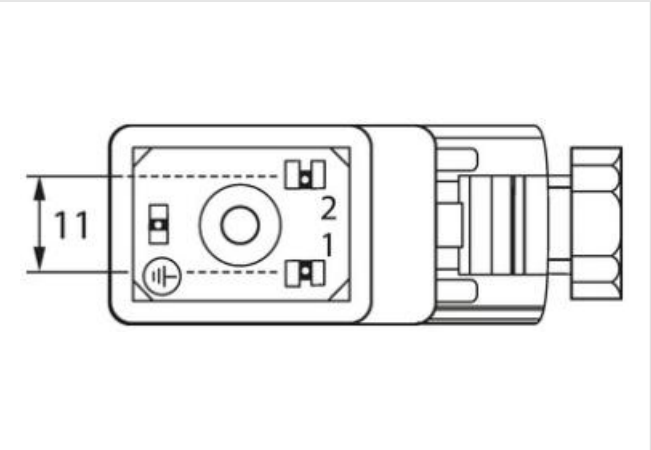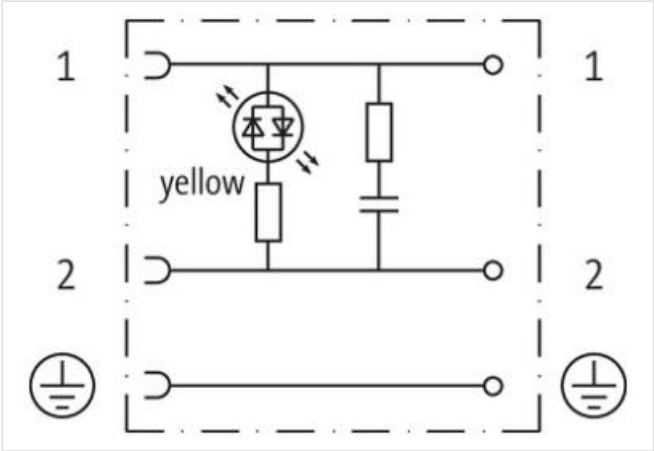

Výrobok sa môže líšiť od zobrazenia

Side 1	
Degree of protection (EN IEC 60529)	IP65
Commercial data	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN	4048879187060
------	---------------

Packaging unit	1
----------------	---

Electrical data

Capacity CX	15 ms
-------------	-------

Holding power max.	50 W
--------------------	------

Electrical data | Supply

Operating voltage AC	230 V
----------------------	-------

Operating voltage AC min.	207 V
---------------------------	-------

Operating voltage AC max.	253 V
---------------------------	-------

Operating voltage DC	230 V
----------------------	-------

Operating voltage DC min.	207 V
---------------------------	-------

Operating voltage DC max.	253 V
---------------------------	-------

Cut-off peak voltage max.	450 V
---------------------------	-------

Current consumption max.	12 mA
--------------------------	-------

Diagnostics

Status indication LED	yellow
-----------------------	--------

Installation

Connection cross section max.	1,5 mm ²
-------------------------------	---------------------

Installation | Connection

Tightening torque	0,4 Nm
-------------------	--------

Mounting set	M3
--------------	----

Device protection | Electrical

Additional condition protection degree	inserted, locked, with screw connection
--	---

Mechanical data | Mounting data

Mounting method	PG9
-----------------	-----

Clamping range min.	6 mm
---------------------	------

Clamping range max.	8 mm
---------------------	------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------