

**T-Coupler Slimline M12 male / 2x M8 female A-cod.**

3-pol. / 2x 3-pol.

T-coupler (Slim Line)

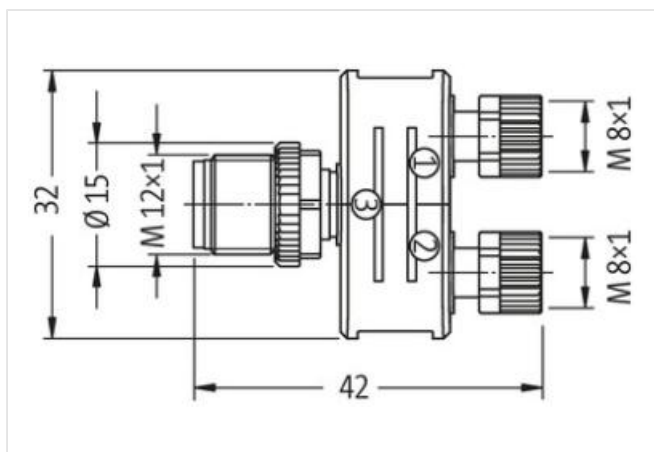
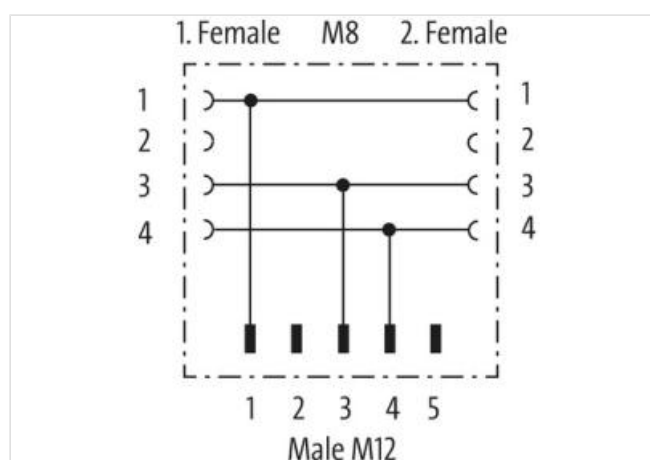
Male straight – females straight

M12 – M8, 3-pole

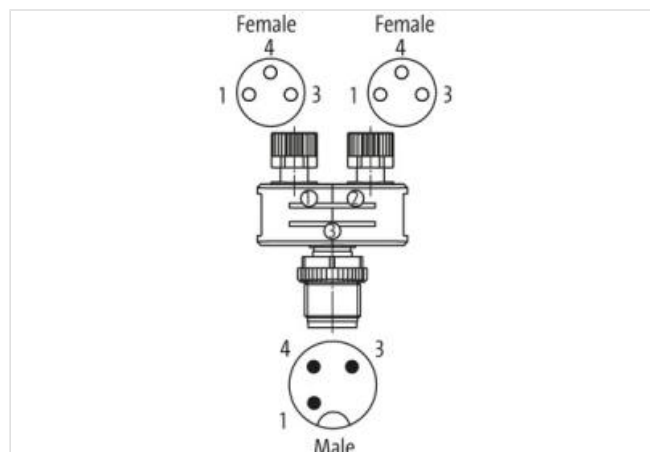
Parallel circuit

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Side 1**

|                                     |            |
|-------------------------------------|------------|
| Tightening torque                   | 0,6 Nm     |
| Family construction form            | M12        |
| Thread                              | M12 x 1    |
| Degree of protection (EN IEC 60529) | IP65, IP67 |

| Side 2                                   |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tightening torque                        | 0,4 Nm                                                                                                                                                |
| Family construction form                 | M8                                                                                                                                                    |
| Thread                                   | M8 x 1                                                                                                                                                |
| Degree of protection (EN IEC 60529)      | IP65, IP67                                                                                                                                            |
| Commercial data                          |                                                                                                                                                       |
| ECLASS-6.0                               | 27143423                                                                                                                                              |
| ECLASS-6.1                               | 27279221                                                                                                                                              |
| ECLASS-7.0                               | 27440104                                                                                                                                              |
| ECLASS-8.0                               | 27440104                                                                                                                                              |
| ECLASS-9.0                               | 27440106                                                                                                                                              |
| ECLASS-10.1                              | 27440106                                                                                                                                              |
| ECLASS-11.1                              | 27440106                                                                                                                                              |
| ECLASS-12.0                              | 27440106                                                                                                                                              |
| ETIM-5.0                                 | EC002062                                                                                                                                              |
| customs tariff number                    | 85366990                                                                                                                                              |
| GTIN                                     | 4048879144759                                                                                                                                         |
| Packaging unit                           | 1                                                                                                                                                     |
| Electrical data   Supply                 |                                                                                                                                                       |
| Operating voltage AC max.                | 60 V                                                                                                                                                  |
| Operating voltage DC max.                | 60 V                                                                                                                                                  |
| Current operating per contact max.       | 4 A                                                                                                                                                   |
| Device protection   Electrical           |                                                                                                                                                       |
| Additional condition protection degree   | inserted, screwed                                                                                                                                     |
| Rated surge voltage                      | 1,5 kV                                                                                                                                                |
| Mechanical data   Mounting data          |                                                                                                                                                       |
| Mounting method                          | Schraubgewinde                                                                                                                                        |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -25 °C                                                                                                                                                |
| Operating temperature max.               | 85 °C                                                                                                                                                 |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |