
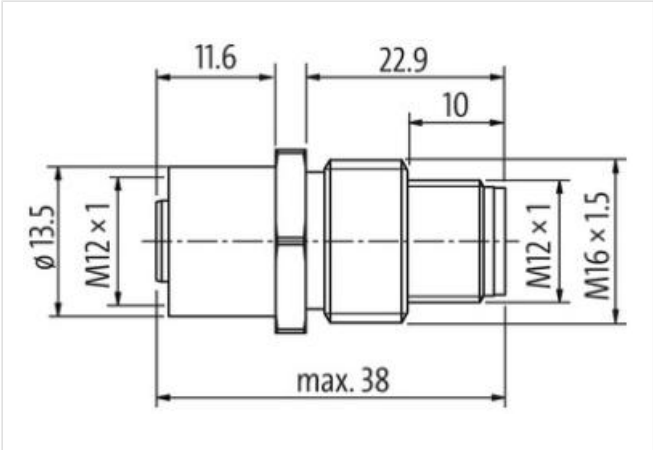
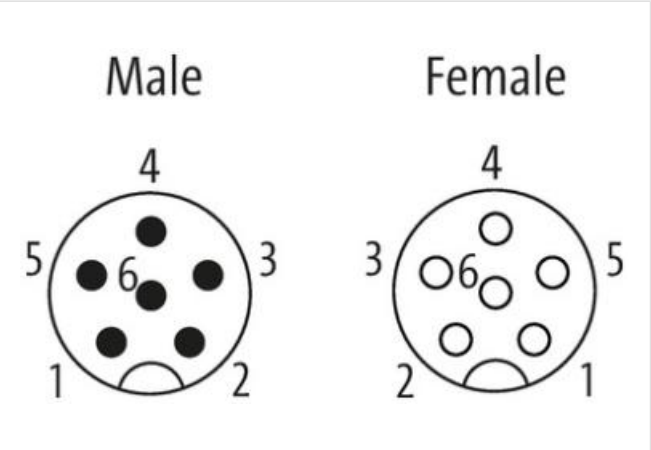


M12-PANEL FEED THROUGH 6POLE A CODED

Control cabinet entry system  
Male - female  
M12, 6-pole  
A-coded  
shielded

Odkaz k produktu

Obrázky

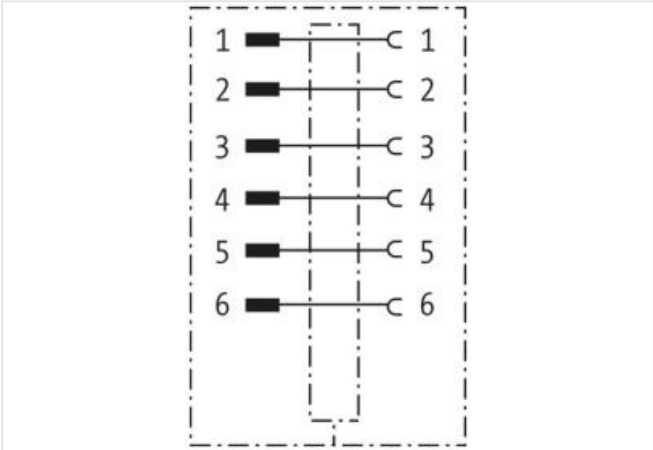

Výrobok sa môže líšiť od zobrazenia

| Side 1                   |          |
|--------------------------|----------|
| Family construction form | M12      |
| Coding                   | A        |
| Side 2                   |          |
| Family construction form | M12      |
| Coding                   | A        |
| Commercial data          |          |
| ECLASS-6.0               | 27279220 |
| ECLASS-6.1               | 27279220 |
| ECLASS-7.0               | 27440103 |
| ECLASS-8.0               | 27440103 |

|                       |               |
|-----------------------|---------------|
| ECLASS-9.0            | 27440109      |
| ECLASS-10.1           | 27440109      |
| ECLASS-11.1           | 27440109      |
| ECLASS-12.0           | 27440109      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879139892 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 30 V |
| Operating voltage DC max.          | 30 V |
| Current operating per contact max. | 4 A  |

**Installation | Connection**

|                   |           |
|-------------------|-----------|
| Tightening torque | 0,6 Nm    |
| Mounting set      | M16 x 1.5 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP65, IP67        |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |               |
|------------------|---------------|
| Coating housing  | nickel plated |
| Material housing | Brass         |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |