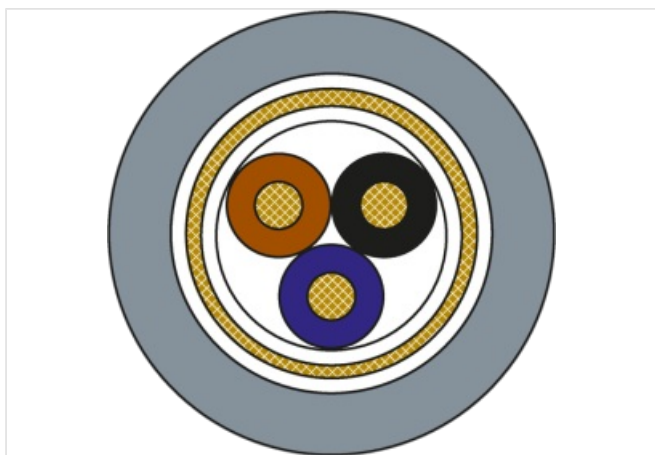


**Cable drum Ø 355mm**

PVC 3x0.34 shielded gy UL/CSA 100m

Cable drum (100 m)

PVC

3× 0.34 mm<sup>2</sup>, grey**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

**Commercial data**

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27062011      |
| ECLASS-6.1            | 27061801      |
| ECLASS-7.0            | 27061801      |
| ECLASS-8.0            | 27061801      |
| ECLASS-9.0            | 27061801      |
| ECLASS-10.1           | 27061801      |
| ECLASS-11.1           | 27061801      |
| ECLASS-12.0           | 27061801      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85444995      |
| GTIN                  | 4048879340809 |
| Packaging unit        | 1             |

**Installation | Cable**

|                            |                      |
|----------------------------|----------------------|
| Cable identification       | 317                  |
| Jacket Color               | gray                 |
| Amount stranding           | 1                    |
| Stranding                  | 3 wires twisted      |
| Stranding factor min.      | 40 mm                |
| Stranding factor max.      | 40 mm                |
| Cable shielding (type)     | copper braid, tinned |
| Cable shielding (coverage) | 85 %                 |
| Banding                    | Fleece, Foil         |
| wire arrangement           | brown, black, blue   |
| Cable weight               | 56,1 g/m             |
| Material jacket            | PVC                  |
| Shore hardness jacket      | 80 ± 5 Shore A       |

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Freedom from ingredients (jacket)                 | lead-free, cadmium-free, CFC-free, silicone-free     |
| Outer-diameter (jacket)                           | 5,9 mm                                               |
| Tolerance outer diameter (sheath)                 | ± 5 %                                                |
| Material wire insulation                          | PVC                                                  |
| Amount wires                                      | 3                                                    |
| Outer diameter insulation                         | 1,4 mm                                               |
| Outer diameter tolerance core insulation          | ± 5 %                                                |
| Shore hardness wire insulation                    | 90 ± 3 Shore A                                       |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount strands (wire)                             | 19                                                   |
| Diameter of single wires                          | 0,15 mm                                              |
| Conductor crosssection (wire)                     | 0,34 mm <sup>2</sup>                                 |
| Material conductor wire                           | Stranded copper wire, bare                           |
| Conductor type (wire)                             | Strand class 5                                       |
| Max. rated voltage (conductor - conductor)        | 500 V                                                |
| Max. rated voltage (conductor - ground)           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 6 A                                                  |
| Electrical resistance line constant wire          | 57 Ω/km @ 20 °C                                      |
| AC withstand voltage (wire - wire)                | 1,5 kV @ 60 s                                        |
| Power frequency withstand voltage (wire - jacket) | 1,5 kV @ 60 s                                        |
| AC withstand voltage (wire - shield)              | 1,5 kV @ 60 s                                        |
| Min. operating temperature (static)               | -40 °C                                               |
| Max. operating temperature (fixed)                | 80 °C                                                |
| Operating temperature min. (dynamic)              | -5 °C                                                |
| Operating temperature max. (dynamic)              | 80 °C                                                |
| Flame resistance                                  | UL 1581 § 1100 FT2   UL 1581 § 1090   IEC 60332-2-2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                            | 10 x Outer diameter                                  |
| Bending radius (dynamic)                          | 15 x Outer diameter                                  |