

**M12 Power female 0° L-cod. with cable**

PUR 5x1.5 bk UL/CSA+drag ch. 25m

Power

Female straight

M12, 5-pole

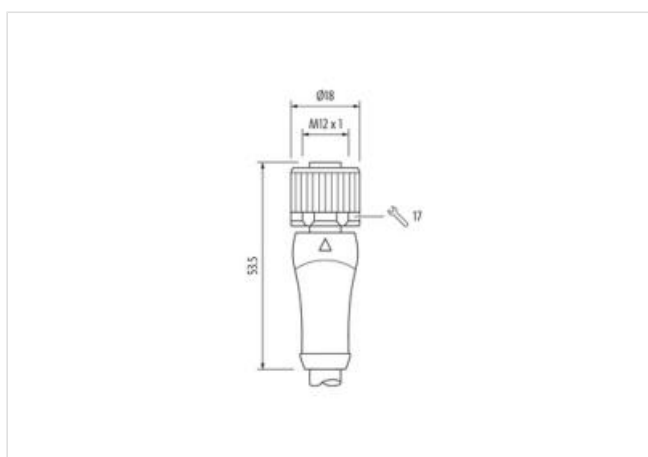
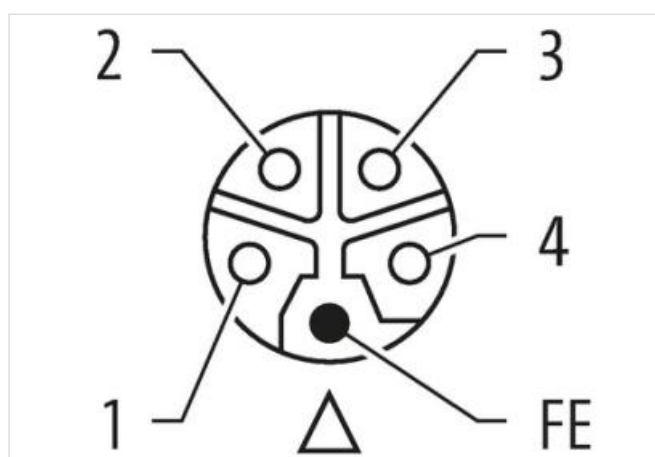
L-coded

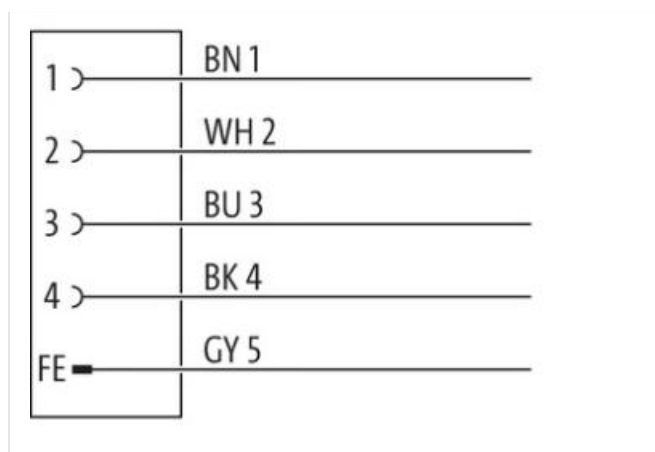
with cable sleeves

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

**Odkaz k produktu****Obrázky**



Výrobok sa môže líšiť od zobrazenia



Cable length 25 m

#### Side 1

|                                           |                    |
|-------------------------------------------|--------------------|
| Tightening torque                         | 0,6 Nm             |
| Mounting method                           | inserted, screwing |
| Coating contact                           | gold plated        |
| Family construction form                  | M12P               |
| Thread                                    | M12 x 1            |
| suitable for corrugated tube (internal Ø) | 12 mm              |
| Coding                                    | L                  |
| Material contact                          | Copper alloy       |
| No. of poles                              | 5                  |

#### Side 2

Stripping length (jacket) 100 mm

#### Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27279218      |
| ECLASS-6.1            | 27279218      |
| ECLASS-7.0            | 27279218      |
| ECLASS-8.0            | 27279218      |
| ECLASS-9.0            | 27060327      |
| ECLASS-10.1           | 27060311      |
| ECLASS-11.1           | 27060311      |
| ECLASS-12.0           | 27060327      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879684279 |
| Packaging unit        | 1             |

#### Electrical data | Supply

|                                    |      |
|------------------------------------|------|
| Operating voltage DC max.          | 63 V |
| Current operating per contact max. | 12 A |

#### Diagnostics

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

#### Installation | Connection

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.  
Zodpovednosť sa obmedzuje hrubou nebanalivosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 02.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

|                           |        |
|---------------------------|--------|
| Stripping length (jacket) | 100 mm |
|---------------------------|--------|

|                    |      |
|--------------------|------|
| Width across flats | SW17 |
|--------------------|------|

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
|----------------------------------------|-------------------|

|                  |   |
|------------------|---|
| Pollution Degree | 3 |
|------------------|---|

|                     |        |
|---------------------|--------|
| Rated surge voltage | 1,5 kV |
|---------------------|--------|

|                              |   |
|------------------------------|---|
| Material group (IEC 60664-1) | I |
|------------------------------|---|

**Mechanical data | Material data**

|                 |          |
|-----------------|----------|
| Coating locking | Nickeled |
|-----------------|----------|

|                 |     |
|-----------------|-----|
| Material gasket | FKM |
|-----------------|-----|

|                  |     |
|------------------|-----|
| Material housing | PUR |
|------------------|-----|

|                  |                  |
|------------------|------------------|
| Locking material | Zinc die-casting |
|------------------|------------------|

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 85 °C |
|----------------------------|-------|

|                                        |                            |
|----------------------------------------|----------------------------|
| Additional condition temperature range | depending on cable quality |
|----------------------------------------|----------------------------|

**Important installation notes**

|                       |                                                                                                     |
|-----------------------|-----------------------------------------------------------------------------------------------------|
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
|-----------------------|-----------------------------------------------------------------------------------------------------|

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

**Conformity**

|                  |                 |
|------------------|-----------------|
| Product standard | IEC 61076-2-111 |
|------------------|-----------------|

**Installation | Cable**

|                      |     |
|----------------------|-----|
| Cable identification | P04 |
|----------------------|-----|

|            |   |
|------------|---|
| Cable Type | 3 |
|------------|---|

|                                   |                                                                                                                           |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Printing color of wire insulation | black (white isolation), white (isolation blue), white (isolation brown), white (isolation black), white (gray isolation) |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|

|              |       |
|--------------|-------|
| Jacket Color | black |
|--------------|-------|

|                     |       |
|---------------------|-------|
| Type of Certificate | cURus |
|---------------------|-------|

|                  |   |
|------------------|---|
| Amount stranding | 1 |
|------------------|---|

|           |                               |
|-----------|-------------------------------|
| Stranding | 5 wires around Filler twisted |
|-----------|-------------------------------|

|        |     |
|--------|-----|
| Filler | yes |
|--------|-----|

|                  |                                           |
|------------------|-------------------------------------------|
| wire arrangement | gray 5, black 4, blue 3, white 2, brown 1 |
|------------------|-------------------------------------------|

|                               |             |
|-------------------------------|-------------|
| Traversing distance (C-track) | 5 m @ 25 °C |
|-------------------------------|-------------|

|              |           |
|--------------|-----------|
| Cable weight | 129,8 g/m |
|--------------|-----------|

|                 |     |
|-----------------|-----|
| Material jacket | PUR |
|-----------------|-----|

|                       |                |
|-----------------------|----------------|
| Shore hardness jacket | 90 ± 5 Shore A |
|-----------------------|----------------|

|                                   |                                                                |
|-----------------------------------|----------------------------------------------------------------|
| Freedom from ingredients (jacket) | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
|-----------------------------------|----------------------------------------------------------------|

|                         |        |
|-------------------------|--------|
| Outer-diameter (jacket) | 8,2 mm |
|-------------------------|--------|

|                                   |       |
|-----------------------------------|-------|
| Tolerance outer diameter (sheath) | ± 5 % |
|-----------------------------------|-------|

|                          |    |
|--------------------------|----|
| Material wire insulation | PP |
|--------------------------|----|

|              |   |
|--------------|---|
| Amount wires | 5 |
|--------------|---|

|                           |        |
|---------------------------|--------|
| Outer diameter insulation | 2,3 mm |
|---------------------------|--------|

|                                          |       |
|------------------------------------------|-------|
| Outer diameter tolerance core insulation | ± 5 % |
|------------------------------------------|-------|

|                                |                |
|--------------------------------|----------------|
| Shore hardness wire insulation | 60 ± 5 Shore D |
|--------------------------------|----------------|

|                                     |                                                                |
|-------------------------------------|----------------------------------------------------------------|
| Ingredient freeness wire insulation | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
|-------------------------------------|----------------------------------------------------------------|

|                                   |                                                                                                                           |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Printing color of wire insulation | black (white isolation), white (isolation blue), white (isolation brown), white (isolation black), white (gray isolation) |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|

|                       |    |
|-----------------------|----|
| Amount strands (wire) | 84 |
|-----------------------|----|

|                          |         |
|--------------------------|---------|
| Diameter of single wires | 0,15 mm |
|--------------------------|---------|

|                               |         |
|-------------------------------|---------|
| Conductor crosssection (wire) | 1,5 mm² |
|-------------------------------|---------|

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Material conductor wire                           | Stranded copper wire, bare                           |
| Conductor type (wire)                             | strand class 6                                       |
| Nominal voltage AC max.                           | 1000 V                                               |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 13,5 A                                               |
| Electrical resistance line constant wire          | 13,3 $\Omega$ /km @ 20 °C                            |
| AC withstand voltage (wire - wire)                | 10 kV @ 60 s                                         |
| Power frequency withstand voltage (wire - jacket) | 10 kV @ 60 s                                         |
| Min. operating temperature (static)               | -50 °C                                               |
| Max. operating temperature (fixed)                | 80 °C / 90 °C @ 10000 h Operation                    |
| Operating temperature min. (dynamic)              | -25 °C                                               |
| Operating temperature max. (dynamic)              | 80 °C / 90 °C @ 10000 h Operation                    |
| UV resistance                                     | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                  | UL 1581 § 1100 FT2   UL 1581 § 1090   IEC 60332-2-2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                            | 7,5 x Outer diameter                                 |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |
| Travel speed (C-track)                            | 5 Mio. @ 25 °C                                       |
| No. of torsion cycles                             | 2 Mio.                                               |
| Torsion stress                                    | $\pm$ 180 °/m                                        |
| Torsion speed                                     | 35 cycles/min                                        |