

**M12 Power female recept. S-cod. front**

mPPE-wires 4x1.5 0.2m

Flange female

M12, 4-pole


S-coded

Front mounting


with multi-strand wire

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

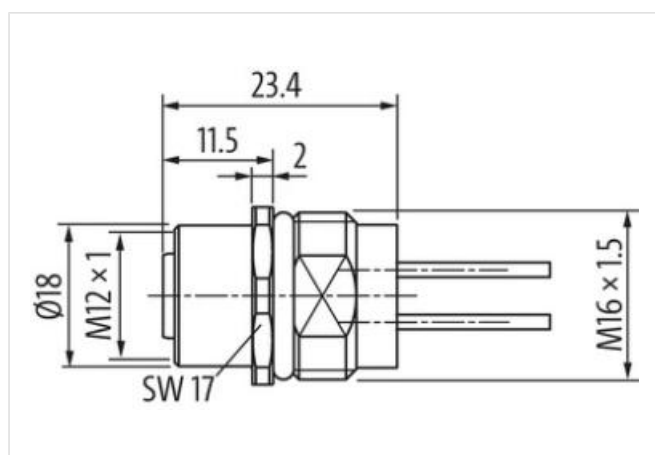**Odkaz k produktu****Obrázky**

Výrobok sa môže líšiť od zobrazenia

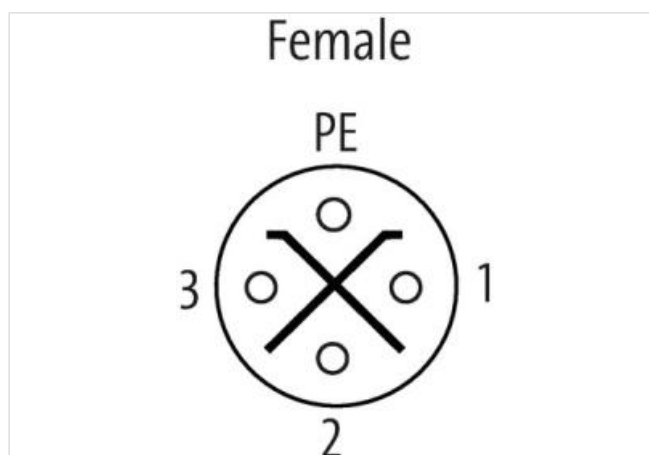

Cable length 0,2 m

**Side 1**

Tightening torque 0,6 Nm

Informácie v tomto produkte PDF boli zostavené s maximálnou starostlivosťou.  
 Zodpovednosť sa obmedzuje hrubou nebanalnosťou vo vzťahu k správnosti, úplnosti a aktuálnosti. Stav: 19.05.2024

Murrelektronik Slovakia s.r.o. | Mýtna 48 | SK-811 07 Bratislava | Telefón +421 2 57 351 351 | Fax | shop@murrelektronik.sk | shop.murrelektronik.sk

|                          |              |
|--------------------------|--------------|
| Coating contact          | gold plated  |
| Family construction form | M12P         |
| Thread                   | M12 x 1      |
| Coding                   | S            |
| Material contact         | Copper alloy |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27279220      |
| ECLASS-6.1            | 27279220      |
| ECLASS-7.0            | 27440103      |
| ECLASS-8.0            | 27440103      |
| ECLASS-9.0            | 27440103      |
| ECLASS-10.1           | 27440103      |
| ECLASS-11.1           | 27440103      |
| ECLASS-12.0           | 27440103      |
| ETIM-5.0              | EC002061      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879651554 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 630 V |
| Operating voltage DC max.          | 630 V |
| Current operating per contact max. | 12 A  |

**Installation | Connection**

|                    |           |
|--------------------|-----------|
| Mounting set       | M16 x 1.5 |
| Width across flats | SW17      |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP68              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 6 kV              |
| Material group (IEC 60664-1)           | III               |

**Mechanical data | Material data**

|                          |    |
|--------------------------|----|
| Material contact carrier | PA |
|--------------------------|----|

**Mechanical data | Mounting data**

|                 |                   |
|-----------------|-------------------|
| Mounting method | inserted, screwed |
|-----------------|-------------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -40 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

**Resistances | Cable**

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| Cable identification                | 940                                     |
| wire arrangement                    | black 1, black 2, black 3, green-yellow |
| Material wire insulation            | PE                                      |
| Amount wires                        | 4                                       |
| Conductor crossection (wire)        | 1,5 mm <sup>2</sup>                     |
| Min. operating temperature (static) | -40 °C                                  |
| Max. operating temperature (fixed)  | 85 °C                                   |

|                     |                                                      |
|---------------------|------------------------------------------------------|
| Flame resistance    | IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090  |
| chemical resistance | Good, application-related testing                    |
| Gasoline resistance | Good, application-related testing                    |
| Oil resistance      | Good, application-related testing   DIN EN 60811-404 |