




M12 male recept. 0° L-cod. rear

4-pol., PCB-Pin

PCB connectors  
Male straight  
M12, 4-pole  
L-coded  
Rear mounting  
THT-solder connection

Odkaz k produktu

Obrázky

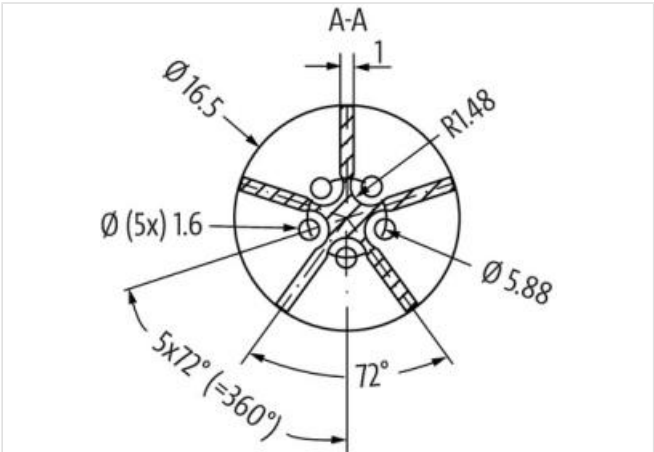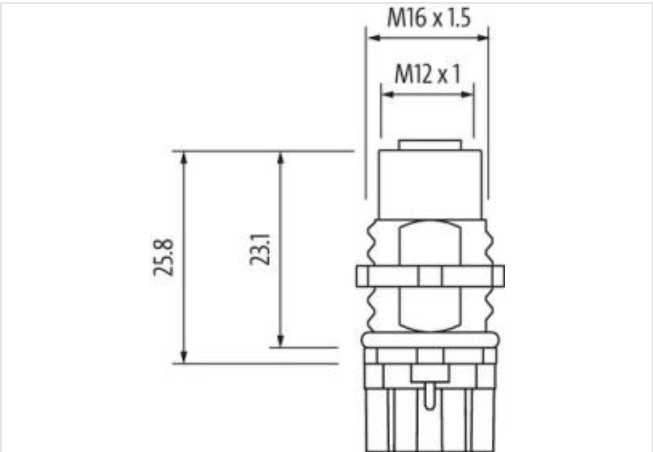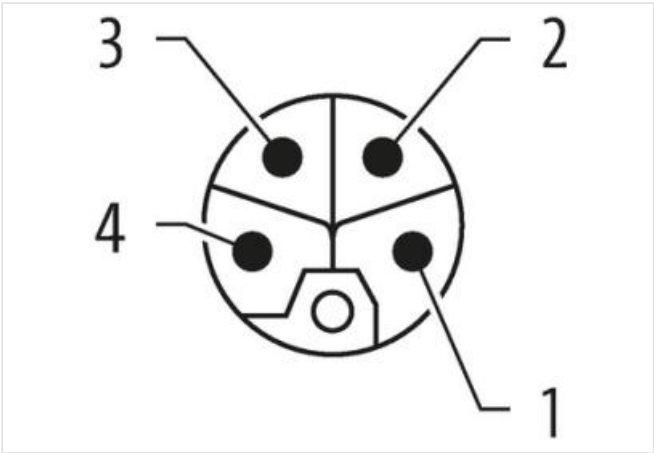

Výrobok sa môže líšiť od zobrazenia



| Side 1                   |              |
|--------------------------|--------------|
| Coating contact          | gold plated  |
| Family construction form | M12P         |
| Coding                   | L            |
| Material contact         | Copper alloy |

No. of poles 4

| Commercial data       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27279220      |
| ECLASS-6.1            | 27279221      |
| ECLASS-7.0            | 27440104      |
| ECLASS-8.0            | 27440104      |
| ECLASS-9.0            | 27440106      |
| ECLASS-10.1           | 27440106      |
| ECLASS-11.1           | 27440106      |
| ECLASS-12.0           | 27440106      |
| ETIM-5.0              | EC002061      |
| customs tariff number | 85366990      |
| GTIN                  | 4065909074688 |
| Packaging unit        | 1             |

| Electrical data   Supply           |      |
|------------------------------------|------|
| Operating voltage DC               | 63 V |
| Current operating per contact max. | 16 A |

| Installation   Connection |                       |
|---------------------------|-----------------------|
| Connection information    | THT-solder connection |
| Tightening torque         | 0,6 Nm                |
| Mounting set              | M16 x 1.5             |
| Family construction form  | M12P                  |
| Width across flats        | SW19                  |

| Device protection   Electrical         |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP65, IP67, IP68  |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |

| Mechanical data   Material data |               |
|---------------------------------|---------------|
| Coating housing                 | nickel plated |
| Material housing                | Copper alloy  |
| Material contact carrier        | PA            |

| Mechanical data   Mounting data |                   |
|---------------------------------|-------------------|
| Mounting method                 | inserted, screwed |

| Environmental characteristics   Climatic |        |
|------------------------------------------|--------|
| Operating temperature min.               | -30 °C |
| Operating temperature max.               | 90 °C  |

| Important installation notes |                                                                                                                                                       |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief        | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius       | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

| Conformity       |                 |
|------------------|-----------------|
| Product standard | IEC 61076-2-111 |