

## M12 bulkhead receptacles V2A

Control cabinet entry system

Male - female

M12, 8-pole




A-coded

shielded

Stainless steel 1.4305 (V2A)

### [Odkaz k produktu](#)

#### Obrázky

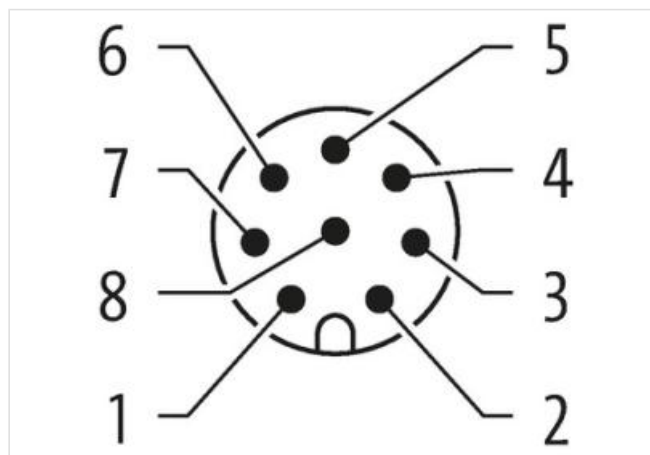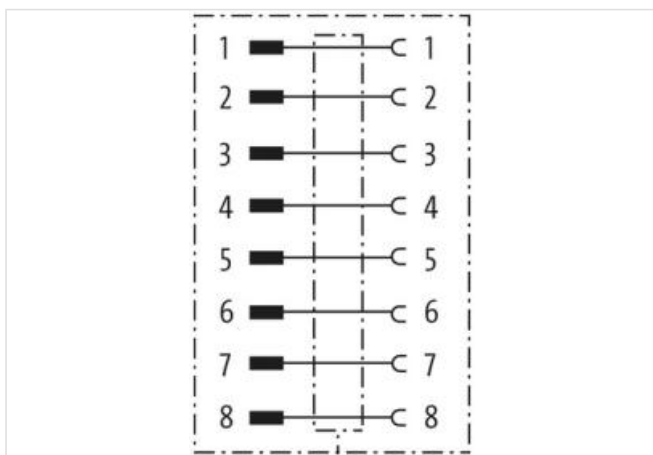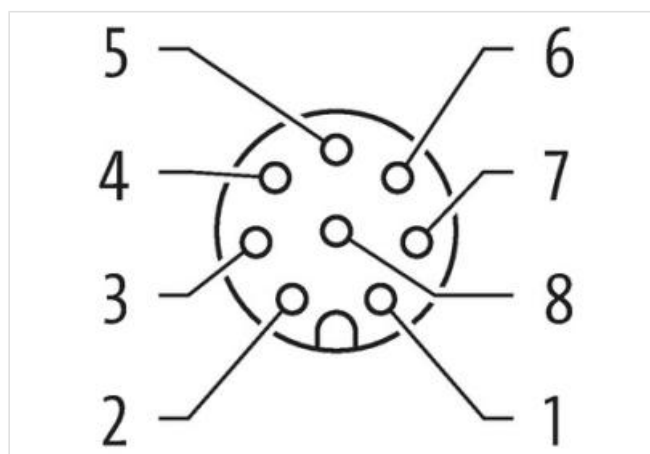



Výrobok sa môže líšiť od zobrazenia

|                                          |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Side 1                                   |                                                                                                                                                       |
| Family construction form                 | M12                                                                                                                                                   |
| Commercial data                          |                                                                                                                                                       |
| ECLASS-6.0                               | 27279221                                                                                                                                              |
| ECLASS-7.0                               | 27440104                                                                                                                                              |
| ECLASS-8.0                               | 27440104                                                                                                                                              |
| ECLASS-9.0                               | 27440102                                                                                                                                              |
| ECLASS-10.1                              | 27440109                                                                                                                                              |
| ECLASS-11.1                              | 27440109                                                                                                                                              |
| ECLASS-12.0                              | 27440109                                                                                                                                              |
| ETIM-5.0                                 | EC001855                                                                                                                                              |
| customs tariff number                    | 85366990                                                                                                                                              |
| GTIN                                     | 4048879566216                                                                                                                                         |
| Packaging unit                           | 1                                                                                                                                                     |
| Electrical data   Supply                 |                                                                                                                                                       |
| Operating voltage AC max.                | 30 V                                                                                                                                                  |
| Operating voltage DC max.                | 30 V                                                                                                                                                  |
| Current operating per contact max.       | 1,5 A                                                                                                                                                 |
| Installation   Connection                |                                                                                                                                                       |
| Tightening torque                        | 0,6 Nm                                                                                                                                                |
| Mounting set                             | M16 x 1.5                                                                                                                                             |
| Device protection   Electrical           |                                                                                                                                                       |
| Degree of protection (EN IEC 60529)      | IP67                                                                                                                                                  |
| Additional condition protection degree   | inserted, screwed                                                                                                                                     |
| Mechanical data   Material data          |                                                                                                                                                       |
| Material housing                         | Stainless steel 1.4305 (V2A)                                                                                                                          |
| Mechanical data   Mounting data          |                                                                                                                                                       |
| Mounting method                          | inserted, screwed, Shaking protection                                                                                                                 |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -25 °C                                                                                                                                                |
| Operating temperature max.               | 85 °C                                                                                                                                                 |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |