

A3 Coupling h., IP65

Single locking lever m., top entry M20

A3

Coupling housing (low)


Single locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

Odkaz k produktu

Obrázky

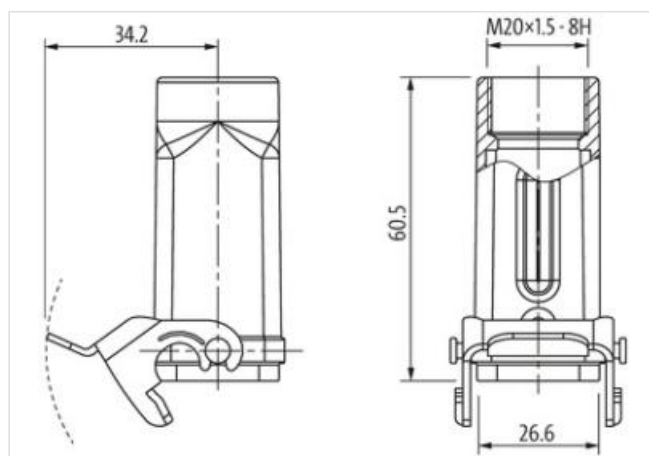

Výrobok sa môže líšiť od zobrazenia

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879716826
Packaging unit	1

Installation

Cable outlet	straight
--------------	----------

Installation | Connection

Mounting set	M20
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type	Coupling housing
--------------	------------------

Mechanical data | Material data

Coating housing	powder-coated
-----------------	---------------

Coating locking	verzinkt
Material housing	Zinc die-casting
Locking material	Steel

Mechanical data | Mounting data

Size	A3
Height	60,5 mm
Width	26,6 mm
Depth	26,6 mm
Locking techniques	Single locking lever

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21