

## Mico Pro Power module

IN: 24 V DC / 40A, 16mm<sup>2</sup> / Cover plate included (heavy duty)

Mico Pro® PM 24 V DC/40 A

Cover plate included (heavy duty)

Shock load


1/2 sin 40 g, 11 ms

Build your own Mico Pro® online:

[START](#)

## Odkaz k produktu

### Obrázky

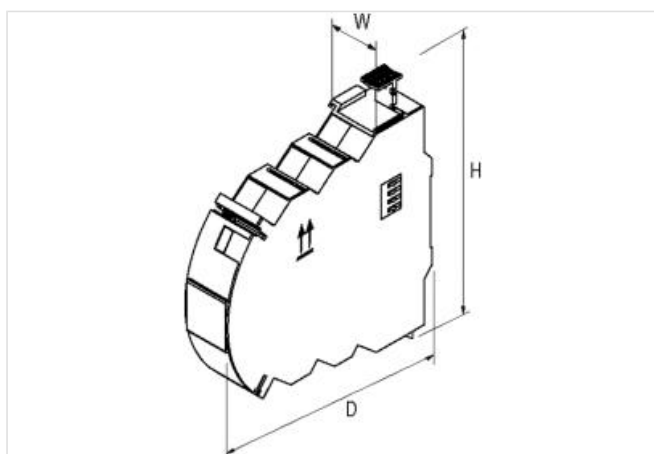

Výrobok sa môže líšiť od zobrazenia



### Commercial data

|            |          |
|------------|----------|
| ECLASS-6.0 | 27371802 |
| ECLASS-6.1 | 27371890 |
| ECLASS-7.0 | 27371890 |

|                       |               |
|-----------------------|---------------|
| ECLASS-8.0            | 27371890      |
| ECLASS-9.0            | 27371802      |
| ECLASS-10.1           | 27371802      |
| ECLASS-11.1           | 27371802      |
| ECLASS-12.0           | 27371802      |
| ETIM-5.0              | EC001440      |
| customs tariff number | 85363030      |
| GTIN                  | 4048879552080 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                    |      |
|--------------------|------|
| Total current max. | 40 A |
|--------------------|------|

**Electrical data | Input**

|                                             |        |
|---------------------------------------------|--------|
| CTRL input voltage control inputs high min. | 9 V    |
| CTRL input voltage control inputs high max. | 30 V   |
| CTRL signal                                 | ON/OFF |
| Input voltage 1 DC                          | 12 V   |
| Input voltage 2 DC                          | 24 V   |
| Input voltage DC min.                       | 9 V    |
| Input voltage DC max.                       | 30 V   |
| ON input voltage control inputs min.        | 9 V    |
| ON input voltage control inputs max.        | 30 V   |
| ON pulse length control inputs high min.    | 120 ms |
| Total current bridge set max.               | 40 A   |

**Electrical data | Output**

|                           |      |
|---------------------------|------|
| Switching voltage AC max. | 30 V |
| Switching voltage DC max. | 30 V |

**Installation**

|                                       |                      |
|---------------------------------------|----------------------|
| Connection cross-section static min.  | 0,75 mm <sup>2</sup> |
| Connection cross section static max.  | 16 mm <sup>2</sup>   |
| Connection cross-section dynamic min. | 0,75 mm <sup>2</sup> |
| Connection cross section dynamic max. | 16 mm <sup>2</sup>   |
| AWG number static min.                | 4                    |
| AWG number static max.                | 20                   |
| AWG number dynamic min.               | 4                    |
| AWG number dynamic max.               | 20                   |

**Installation | Connection**

|            |               |
|------------|---------------|
| Connection | Bridge system |
|------------|---------------|

**Device protection | Electrical**

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP20 |
|-------------------------------------|------|

**Device protection | Mechanical**

|                                      |                     |
|--------------------------------------|---------------------|
| Shock resistance (EN IEC 60068-2-27) | 40 g, 11 ms 1/2 sin |
|--------------------------------------|---------------------|

**Mechanical data | Mounting data**

|                            |                                |
|----------------------------|--------------------------------|
| Mounting method            | geschnappt                     |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| Height                     | 130 mm                         |
| Width                      | 24 mm                          |
| Depth                      | 114 mm                         |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 55 °C  |

Storage temperature min. -40 °C

Storage temperature max. 80 °C

**Connection type 7**

Family construction form Bridging Contact

Gender female

Color contact carrier black

No. of poles 1

PIN 1 UB In + 24 V DC

Family construction form Bridging Contact

Gender female

Color contact carrier black

No. of poles 1

PIN 1 0 V

Family construction form Bridging Contact

Gender female

Color contact carrier black

No. of poles 4

PIN 1 On

PIN 2 Ctrl

PIN 3 Alarm

PIN 4 0.9

Family construction form Bridging Contact

Gender male

Color contact carrier black

No. of poles 4

PIN 1 On

PIN 2 Ctrl

PIN 3 Alarm

PIN 4 0.9

Connection Spring clamp terminals FK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 2

PIN 1 13 Alarm

PIN 2 14 Alarm

Connection Spring clamp terminals FK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 2

PIN 1 23 90%

PIN 2 24 90%

Connection Spring clamp terminals FK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 2

PIN 1 Ctrl

PIN 2 On